


Code: OR-PI-456/230AC

## RELAY **OR-PI-456/230AC** ORNO

It can be used to increase maximal load of controller transistor output line and for galvanic isolation between output line and load point.

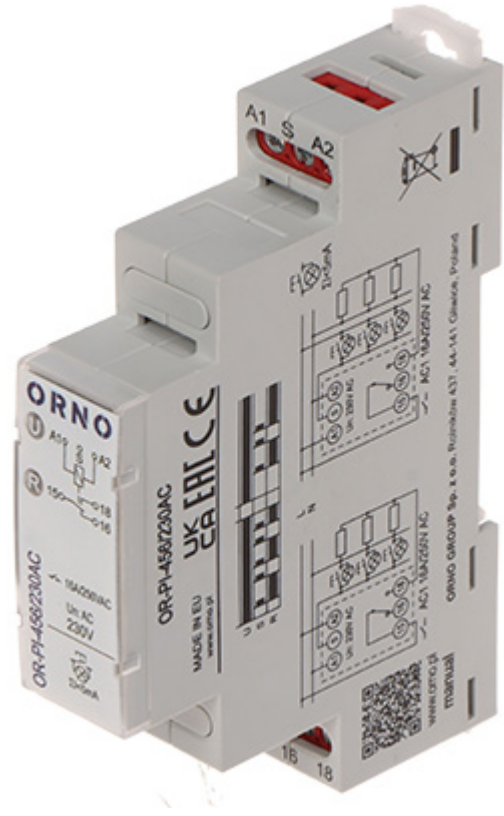

Number of relay outputs:	1
Power supply:	230 V AC
Current consumption:	30 mA @ 230 V AC
Relay maximal load:	16 A / 250 V AC (max) 16 A / 24 V DC (max)
Output:	1 x NO/NC
Main features:	<ul style="list-style-type: none"> <li>• DIN, TS-35 rail mounting</li> <li>• LED indication</li> <li>• Bistable operation controlled by the S control input</li> </ul>
Operation temp:	-20 °C ... 50 °C
Weight:	0.07 kg
Dimensions:	97 x 17 x 65 mm
Manufacturer / Brand:	ORNO
Guarantee:	2 years