


Code: UTP/K5-B2CA/305M/SET

TWISTED-PAIR CABLE **UTP/K5-B2CA/305M/SET** B2ca-s1a d0 a1 NETSET

The UTP/K5-B2CA/305M/SET twisted-pair cable is designed to professional applications of installation. For convenience, cable is marking with length counter printed with 1 m distance step.

The cable complies with the CPR No. 305/2011 directive and meets the requirements of the PN-EN 50575 European standard which specifies requirements in fire conditions, test methods and rating of cables used as building material. The cable has a Declaration of Performance and a CE marking, which confirm its compliance with the guidelines of the CPR regulation.

Thanks to meeting high criteria for fire resistance, the twisted pair is ideal for use in buildings and locations that have increased requirements for fire resistance - e.g. corridors, staircases or evacuation routes.

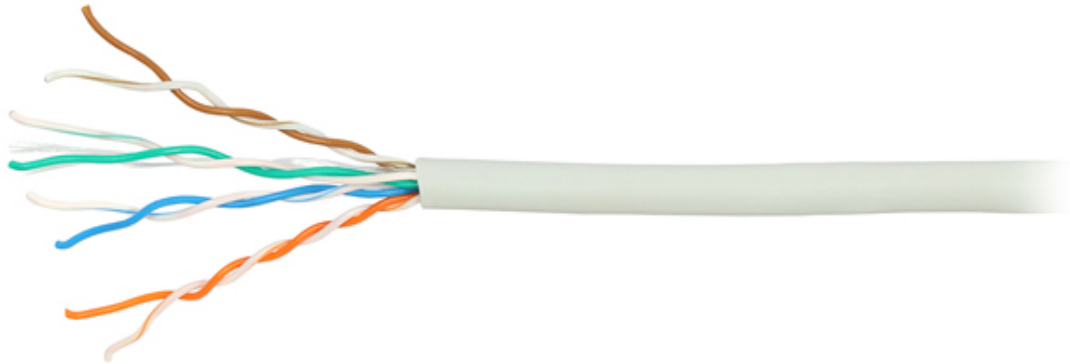

In section:	305 m . Price for 1m when buying a whole roll
Type:	UTP cat. 5e
Inner conductor:	Ø 0.49 mm AWG 24, Wire Cu
Resistance:	9.5 Ω / 100 m
Shield:	—
Outer coating:	Ø 5.4 mm FR-LSZH
Coating color:	Gray (RAL 7032)
Flammability class:	B2ca-s1a d0 a1
Supported norms:	EN 50575:2014, EN60332-1-2:2004, EN50399:2011, EN60754-2:2014, EN 13501-6:2014
Operation temp:	-20 °C ... 70 °C
Manufacturer / Brand:	NETSET
Guarantee:	15 years