


Code: K-60+2X0.50

CCTV CABLE **K-60+2X0.50**

CCTV specialized cable.

The cable complies with the CPR No. 305/2011 directive and meets the requirements of the PN-EN 50575 European standard which specifies requirements in fire conditions, test methods and rating of cables used as building material. The cable has a Declaration of Performance and a CE marking, which confirm its compliance with the guidelines of the CPR regulation.

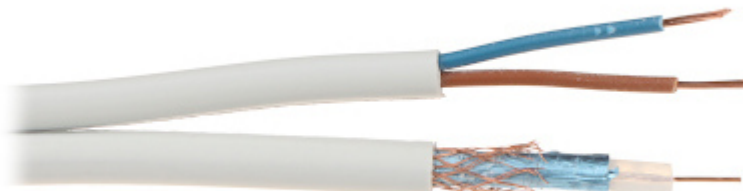

| In section: | 100 m . Price for 1m when buying a whole roll |
|------------------------------------|---|
| Coaxial cable: | K-60 |
| Inner conductor: | Ø 0.59 mm Cu - Wire |
| Dielectric: | Ø 3.7 mm PE full |
| Shield: | Al foil + PET |
| Braid: | Wire Cu |
| Impedance: | 75 Ω |
| Outer coating: | Ø 5.5 mm PVC |
| Cable attenuation at 100m section: | 10.6 dB @ 100 MHz 15.2 dB @ 200 MHz 25.4 dB @ 500 MHz 38.9 dB @ 1000 MHz |
| Electrical cable: | |
| Inner conductor: | 2 x 0.5 mm ² Stranded wire |
| Power wires resistance: | 4 Ω / 100 m |
| Guarantee: | 2 years |