


Code: AWZ-508

RELAY MODULE **AWZ-508**

It can be used to increase maximal load of controller transistor output line and for galvanic isolation between output line and load point.

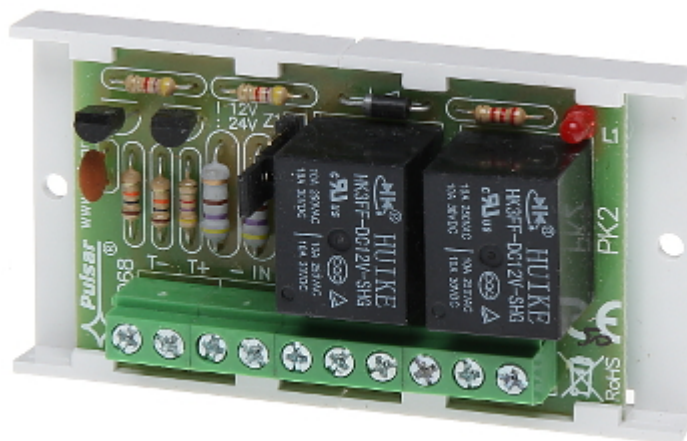

Number of relay outputs:	2
Power supply:	• 10 ... 15 V DC, • 21 ... 28 V DC (set by jumpers)
Current consumption:	75 mA (max)
Relay maximal load:	2 A (max), 30 V DC / 50 V AC (max)
Output:	2 x NO/NC
Main features:	• relay inputs triggering by low or high voltage - T- / T+ input • LED indication
Operation temp:	-10 °C ... 40 °C
Weight:	0.04 kg
Dimensions:	79 x 43 x 23 mm
Manufacturer / Brand:	PULSAR
Guarantee:	2 years