


Code: SF-1

## SOFT START MODULE **SF-1**

"Soft Start" module limits temporarily high inrush current of the inductive receivers at power up. The module is used as delayed current protection of the toroidal transformers, auto-transformers and halogen lamps.  
**DANGER!** Lethal voltage on board. Use extreme caution!  
 Module should be mounted in enclosures with electrically insulating material with keeping the proper insulating distances.

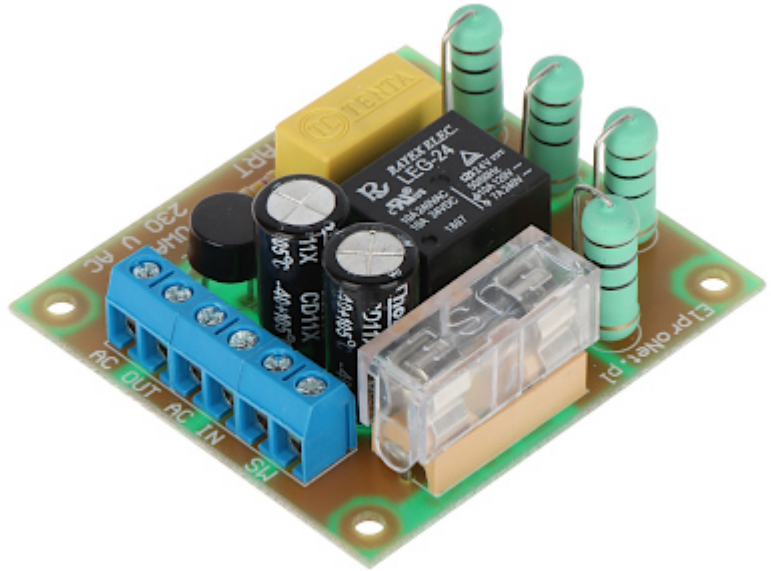

Number of control inputs:	1
Number of power inputs:	1
Number of power outputs:	1
Voltage:	230 V AC
Maximal output power:	1150 W
Protection type:	5 A 5/20mm delayed fuse
Connectors type:	3 x screw terminals max. 1.5 mm <sup>2</sup>
Montage hole diameter:	3 mm
Mounting holes distance:	52 x 47 mm
Dimensions:	60 x 55 x 28 mm
Weight:	0.04 kg
Guarantee:	2 years