


Code: PK1-5-ZN

## NORMALLY OPEN RELAY MODULE **PK1-5-ZN** DELTA

It can be used to increase maximal load of controller transistor output line and for galvanic isolation between output line and load point.  
The self-adhesive distance elements allow to easy PCB assembly.

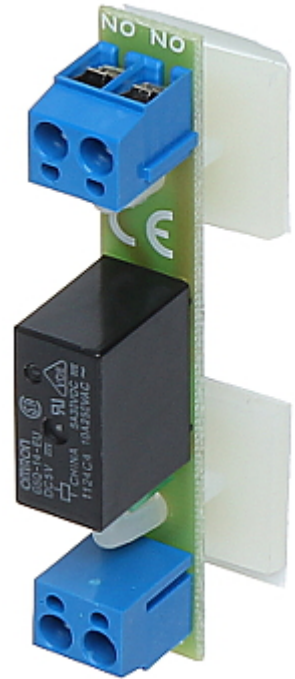

Number of relay outputs:	1
Power supply:	5 ... 9 V DC
Current consumption:	80 mA / 5 V DC
Relay maximal load:	5 A (max), 30 V DC / 50 V AC (max)
Output:	NO
Application:	relay for electromagnetic lock/electric strike
Main features:	<ul style="list-style-type: none"> <li>• Mounting with self-adhesive bases,</li> <li>• LED indication,</li> <li>• Protections : Overvoltage, Reverse polarity connection</li> </ul>
Operation temp:	-40 °C ... 85 °C
Weight:	0.02 kg
Dimensions:	69 x 18 x 27 mm
Manufacturer / Brand:	DELTA
Guarantee:	<b>3 years</b>