


Code: PK1-24-ZN

NORMALLY OPEN RELAY MODULE **PK1-24-ZN** DELTA

It can be used to increase maximal load of controller transistor output line and for galvanic isolation between output line and load point.
The self-adhesive distance elements allow to easy PCB assembly.

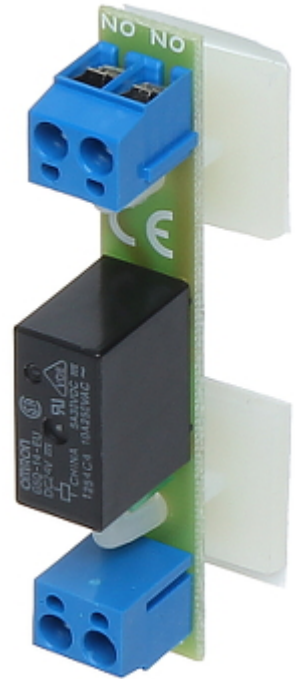

Number of relay outputs:	1
Power supply:	24 ... 45 V DC
Current consumption:	17 mA / 24 V DC
Relay maximal load:	5 A (max), 30 V DC / 50 V AC (max)
Output:	NO
Application:	relay for electromagnetic lock/electric strike
Main features:	<ul style="list-style-type: none"> • Mounting with self-adhesive bases, • LED indication, • Protections : Overvoltage, Reverse polarity connection
Operation temp:	-10 °C ... 40 °C
Weight:	0.02 kg
Dimensions:	69 x 18 x 27 mm
Manufacturer / Brand:	DELTA
Guarantee:	3 years