


Code: PK4-12-ZN/S

NORMALLY OPEN RELAY MODULE **PK4-12-ZN/S** DELTA

It can be used to increase maximal load of controller transistor output line and for galvanic isolation between output line and load point.

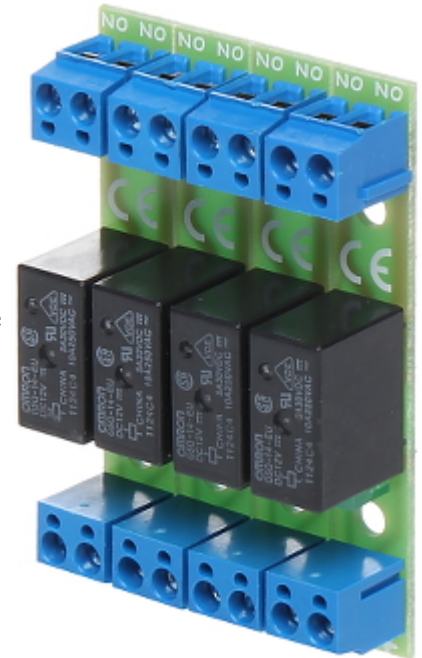

Number of relay outputs:	4
Power supply:	10 ... 16 V DC
Current consumption:	35 mA per each relay at voltage 12 V DC
Relay maximal load:	10 A (max), 30 V DC / 50 V AC (max)
Output:	4 x NO
Application:	relay for electromagnetic lock/electric strike
Main features:	<ul style="list-style-type: none"> • Mounting with self-adhesive bases, • Screw mounting with spacers, • LED indication, • Protections : Overvoltage, Reverse polarity connection
Operation temp:	-10 °C ... 40 °C
Weight:	0.05 kg
Dimensions:	69 x 45 x 20 mm
Manufacturer / Brand:	DELTA
Guarantee:	3 years