


Code: PK1-12-PWC

## TIME RELAY MODULE **PK1-12-PWC** DELTA

The PK1-12-PWC time relay has 8 operating modes. Operation of the device may depend on the power supply only or the signal at the S control input. The control input can react to rising or falling edge, high or low state depending on the setting of the H/L jumper. The device has 2 time ranges: 230 ms ... 60 s and 2 s ... 10 min.

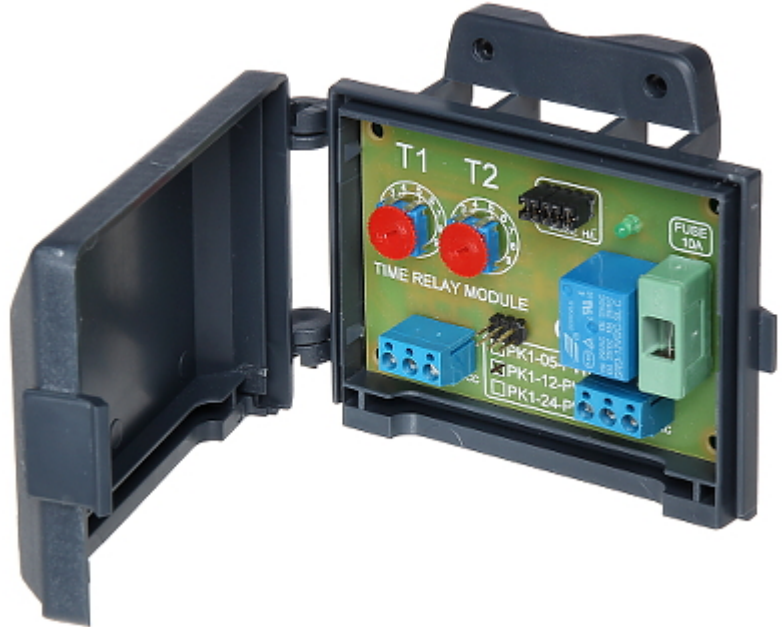

Number of relay outputs:	1
Power supply:	10 ... 16 V DC
Current consumption:	35 mA (max)
Relay maximal load:	10 A (max) @ 30 V DC / 50 V AC (max)
Output:	1 x NO/NC
Main features:	<ul style="list-style-type: none"> <li>• Time settings range</li> <li>1. Range : 0.23 s ... 60 s ,</li> <li>2. Range : 2 s ... 10 minutes</li> <li>• LED indication</li> <li>• Glass Fuse 10 A</li> </ul>
Operation modes:	<ul style="list-style-type: none"> <li>• Voltage switch-on delay</li> <li>• Voltage switch-off delay</li> <li>• Cycler - alternately switching on and off</li> <li>• Switch-off delay without the possibility of extension</li> <li>• Switch-off delay with the possibility of extension</li> <li>• Generation of extension pulse edge triggered</li> <li>• Bistable operation controlled by the S control input</li> <li>• Cycler with adjustable pulse filling</li> </ul>
Operation temp:	-10 °C ... 40 °C
Weight:	0.092 kg
Dimensions:	120 x 91 x 36 mm
Manufacturer / Brand:	DELTA



# DATA SHEET

---

Guarantee:	3 years
------------	---------