


Code: RI-2/1F-DS

SPLITTER **RI-2/1F-DS**

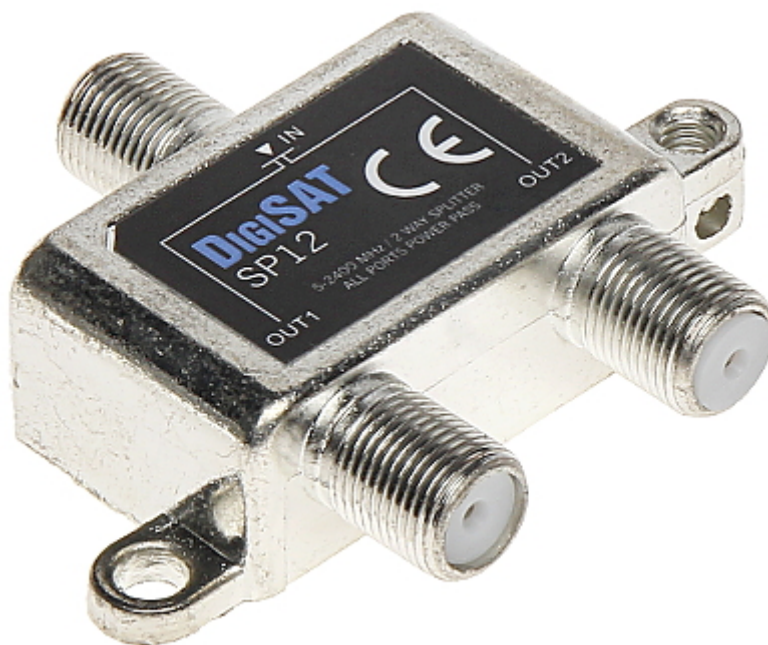

Number of inputs:	1 pcs
Number of outputs:	2 pcs
Frequency range:	5 ... 2400 MHz
Attenuation:	< 3.5 dB @ 5 MHz ... 40 MHz < 3.8 dB @ 40 MHz ... 1000 MHz < 4.0 dB @ 1000 MHz ... 1750 MHz < 4.5 dB @ 1750 MHz ... 2400 MHz
Isolation between outputs:	> 14 dB @ 5 MHz ... 40 MHz > 22 dB @ 40 MHz ... 1000 MHz > 20 dB @ 1000 MHz ... 1750 MHz > 20 dB @ 1750 MHz ... 2400 MHz
Possibility to pass the DC voltage to the preamplifier:	max. 24 V / 0.8 A (for each output)
Shielding:	✓
Impedance:	75 Ω
Weight:	0.032 kg
Dimensions:	57 x 48 x 15 mm
Guarantee:	2 years