

Code: ATE-CAM-IPC650
IP MOBILE CAMERA ATE-CAM-IPC650 - 1080p 2.8 mm AUTONE

Warning!

Please read the user manual included in this work as it contains important information related with safety of installation and use of the device.

Only persons who read the user manual may use the device.

The user manual must be kept because it may be required in the future. The device is to be used exclusively for purposes specified in this user manual.

The device must be unpacked prior to starting-up. After removing the packaging make sure the device is in working order. If the product has defects, it should not be used until it is repaired.

The product is intended for use at home and commercial use and may not be used for other than intended use.

The manufacturer is not liable for damages resulting from not adhering to the rules contained in the user manual, therefore, we recommend to follow the aforementioned safety rules for operation and maintenance of the device. In this way you will ensure yourself safety and avoid causing damage to the device.

The manufacturer and the supplier are not liable for losses or damages arising out of the product, including financial or intangible losses, loss of profits, income, data, pleasure from use of the product or other products related with it - indirect, incidental or consequential loss or damage. The above provisions apply whether the loss or damage concerns:

- 1. Deterioration of quality or the lack of operation of the products or products related with it due to damage as well as the lack of access to the product when it is undergoing repair, which results in stoppage the loss of user's time or a break in business activity;
- 2. Improper results of operation of the product or products related with it;
- 3. It applies to losses and damages according to any legal category, including negligence and other losses, termination of a contract, expressed or implied guarantee and strict liability (even if the manufacturer or the supplier was notified about the possibility of occurrence of such damages).

Safety measures:

Particular attention at designing was directed to quality standards of the device where ensuring safety of operation is the most important factor.

The device must be secured against contact with caustic, staining and viscous fluids.

The device was designed in such a way that it restarts operation when power supply is restored after a break.

Attention! We recommend using protections to further protect the device from possible overvoltages in installations. Surge protectors are effective protection against accidental pass to the device voltages higher than the rated. Damages caused by pass the voltages higher than specified in manual, are not under warranty.

Turn off the device before transporting it.

Prior to connecting the device to a power source check whether the supplied voltage is consistent with rated voltage specified in the user manual.

Proper product disposal:

A marking of a crossed out waste bin indicates that the product may not be disposed together with other household waste in the entire EU. To avoid possible damage to the natural environment of health due to uncontrolled waste disposal, therefore, it should be handed over for recycling, propagating in this way sustainable use of natural resources.

To return a worn-out product, use a collection and disposal system of this type of equipment or contact a seller from whom it was purchased. He will then be recycled in an environmentally-friendly way.

Mobile IP camera equipped with M12, 6-pin - code A connector, providing image in maximum resolution Full HD, 1080p.





Code: ATE-CAM-IPC650 IP MOBILE CAMERA **ATE-CAM-IPC650** - 1080p 2.8 mm AUTONE

10-17 Sensor: 17-77 Matrix stra: 2.1 Mpx 1920 x 1080 - 1080p 1920 x 1080p	Standard:	TCP/IP
Matrix size: 2.1 Mpx Resolution: 1920 x 1080 + 1080 p Lens: 2.8 mm View angle: •59 "countable turn data" *90 "our tests result) Range of IR illumination: 10 m S/N ratio: ≥ 58 dB ISS Heartface: — Momory card slot: — Image compression method: H.264 ONVIF: ✓ Alarm inputs / outputs: — Alarm inputs / outputs: — Alarm inputs / outputs: — Mail steam frame rate: 20 fps @ 1080p Network interface: 10/100 Base T- M12, 6-pin socket - Code A Main features: • Motion Detection Network interface: 10/100 Base T- M12, 6-pin socket - Code A Main features: • Motion Detection Network supply: 2 × Wolfon Detection Power supply: 2 × You own Male Power consumption: ≤ 5 W Mobile phones support: — Default IP address: 192 To You own A Default IP address: 8899		
Resolution: 1920 x 1080 - 1080p Lons: 2.8 mm View angle: •95 * (manufacturer dath) Pob * (our tests result) Range of IR Illumination: 10 m S/N ratio: ≥ 58 dB RS 485 interface: - Memory card slot: - Image compression method: H. 264 ONVIF: ✓ Alarm inputs / outputs: - Jaminuts / outputs: - Audio: - Network interface: 10/100 Base T- M12, 6-pin socket - Code A Network interface: 10/100 Base T- M12, 6-pin socket - Code A Main features: - Motion Detection - vacc - Auton Write Balance Power supply: 12 V DC / 600 mA Power consumption: ≤ 5 W Mobile phones support: - Default IP address: 192.168.1.1 Default user password: admin / - Web browser access ports: 8899 PC client access ports: 8899 PC client access ports: 8899 Bousing: Mini. Metal <td></td> <td></td>		
Lons: 2.8 mm View angle: •95 ° (manufacturer data) •90 ° (our tests result) Range of IR illumination: 10 m Sy ratio: ≥ 58 dB RS-485 interface: — Memory card slot: — Image compression method: H.264 ONVIP: ✓ Alarm inputs / outputs: — Aadio: — Main stream frame rate: 20 fps @ 1080p Network interface: 10/100 Base-T - M12, 6-pin socket - Code A Main features: 10/100 Base-T - M12, 6-pin socket - Code A Main features: 10/100 Base-T - M12, 6-pin socket - Code A Multive Balance ** ABC - Automatic Gain Control ** ABC - Automatic Gain Control ** ABC - Automatic Gain Control ** SEC		·
View angle: •95 ° (manufacturer data) Range of IR illumination: 10 m S/N ratio: ≥ 58 dB 85-485 interface: — Memory card slot: — Image compression method: H.264 ONVIF: ✓ Alarm inputs / outputs: — Audio: — Main stream frame rate: 20 fps @ 1080p Network interface: 10/100 Base T - M12, 6-pin socket - Code A Main features: * Motion Detection on ACC - Automatic Gain Control on ACC - Automatic Gain Con		
vew augus: • 90 ° (our tests result) Range of IR illumination: 10 m S/N ratio: ≥ 58 dB RS-485 interface: — Memory card slot: — Image compression method: H.264 ONVIF: ✓ Adam inputs / outputs: — Adulo: — Main stream frame rate: 20 fps @ 1080p Network interface: 10/100 Base-T - ML2, 6-pin socket - Code A Main features: - Motion Detection - Auto White Balance - Auto White Balance - Auto White Balance - Auto White Gain Control - BLC - Back Light Compensation Power supply: 12 V DC / 660 mA Power consumption: ≤ 5 W Mobile phones support: — Default Paddress: 192.168.1.1 Default user password: admin / - Web browser access ports: 8899 PC client access ports: 8899 Housing: Mini, Metal Color: Black "Index of Protection": 1P67 Operation temp: 20 °C 60 °C Weight: 0.14 kg	Lens:	
SN ratio: ≥ 58 dB RS-485 interface: — Memory card slot: — Image compression method: H.264 ONVIF: ✓ Alarm inputs / outputs: — Audio: — Main stream frame rate: 20 fps @ 1080p Network interface: 10/100 Base-T - M12, 6-pin socket - Code A Main features: - Motion Detection of a Sci C Automatic Gain Control a Place - AGC -	View angle:	• 95 ° (manufacturer data) • 90 ° (our tests result)
RS-485 interface: — Memory card slot: — Inage compression method: H.264 ONVIF: ✓ Alarm inputs / outputs: — Audio: — Main stream frame rate: 20 fps @ 1080p Network interface: 10/100 Base-T · M12, 6-pin socket - Code A Main features: *Motion Detection * Auto White Balance * Auto W	Range of IR illumination:	10 m
Image compression method:	S/N ratio:	≥ 58 dB
Image compression method: H. 264 ONVIF: ✓ Alarm inputs / outputs: — Audio: — Main stream frame rate: 20 fps @ 1080p Network interface: 10/100 Base-T - M12, 6-pin socket - Code A Main features: * Motion Detection * Auto White Balance * AGC - Automatic Gain Control * Automatic Gain Control * Automatic Gain Contro	RS-485 interface:	_
ONVIF: ✓ Alarm inputs / outputs: — Audio: — Main stream frame rate: 20 fps @ 1080p Network interface: 10/100 Base-T - M12, 6-pin socket - Code A Main features: 4 Motion Detection - Auto White Balance - ACC - Automatic Gain Control - AUTO White Balance - ACC - Automatic Gain Control - BLC - Back Light Compensation Power supply: 12 V DC / 600 mA Power consumption: ≤ 5 W Mobile phones support: — Default IP address: 192.168.1.1 Default user password: admin / - Web b rowser access ports: 8899 PC client access ports: 8899 Housing: Mini, Metal Color: Black "Index of Protection": IP67 Operation temp: -20 °C 60 °C Weight: 0.14 kg Dimensions: 47 x 41 x 40 mm Supported languages: English	Memory card slot:	-
Alarm inputs / outputs: — Audio: — Main stream frame rate: 20 fps @ 1080p Network interface: 10/100 Base-T · M12, 6-pin socket · Code A Main features: • Motion Detection • Act or Automatic Gain Control • BLC · Back Light Compensation Power supply: 12 V DC / 600 mA Power consumption: ≤ 5 W Mobile phones support: — Default IP address: 192.168.1.1 Default user password: admin / - Web browser access ports: 8899 PC client access ports: 8899 Housing: Mini, Metal Color: Black "Index of Protection": 1P67 Operation temp: 20 °C 60 °C Weight: 0.14 kg Dimensions: 47 x 41 x 40 mm Supported languages: English	Image compression method:	H.264
Audio: — Main stream frame rate: 20 fps @ 1080p Network interface: 10/100 Base-T - M12, 6-pin socket - Code A Main features: • Motion Detection - Auto White Balance - ACC - Automatic Gain Control - BLC - Back Light Compensation Power supply: 12 V DC / 600 mA Power consumption: ≤ 5 W Mobile phones support: — Default IP address: 192.168.1.1 Default user password: admin / - Web browser access ports: 8899 PC client access ports: 8899 Housing: Mini, Metal Color: Black "Index of Protection": IP67 Operation temp: -20 °C 60 °C Weight: 0.14 kg Dimensions: 47 x 41 x 40 mm Supported languages: English	ONVIF:	✓
Main stream frame rate: 20 fps @ 1080p Network interface: 10/100 Base-T - M12, 6-pin socket - Code A Main features: - Notion Detection and White Balance and Control and Power supply: Power supply: 12 V DC / 600 mA Power consumption: - S W Mobile phones support: Default IP address: 192.168.1.1 Default user password: admin / - Web browser access ports: 8899 PC client access ports: 8899 Housing: Min, Metal Color: Black "Index of Protection": 1P67 Operation temp: -20 °C 60 °C Weight: 0.14 kg Dimensions: 47 x 41 x 40 mm Supported languages: English	Alarm inputs / outputs:	_
Network interface: 10/100 Base-T - M12, 6-pin socket - Code A Main features: . Motion Detection - Auto White Balance - AGC - Automatic Gain Control - BLC - Back Light Compensation Power supply: 12 V DC / 600 mA Power consumption: ≤ 5 W Mobile phones support: — Default IP address: 192.168.1.1 Default user password: admin / - Web browser access ports: 8899 PC client access ports: 8899 Housing: Mini, Metal Color: Black "Index of Protection": IP67 Operation temp: -20 °C 60 °C Weight: 0.14 kg Dimensions: 47 x 41 x 40 mm Supported languages: English	Audio:	-
Main features: • Motion Detection • Auto White Balance • AGC - Automatic Gain Control • BLC - Back Light Compensation Power supply: 12 V DC / 600 mA Power consumption: ≤ 5 W Mobile phones support: — Default IP address: 192.168.1.1 Default user password: admin / - Web browser access ports: 8899 PC client access ports: 8899 Housing: Mini, Metal Color: Black "Index of Protection": IP67 Operation temp: -20 °C 60 °C Weight: 0.14 kg Dimensions: 47 x 41 x 40 mm Supported languages: English	Main stream frame rate:	20 fps @ 1080p
Main features: • Auto White Balance e ACC - Automatic Gain Control e BLC - Back Light Compensation Power supply: 12 V DC / 600 mA Power consumption: ≤ 5 W Mobile phones support: — Default IP address: 192.168.1.1 Default user password: admin / - Web browser access ports: 8899 PC client access ports: 8899 Housing: Mini, Metal Color: Black "Index of Protection": 1P67 Operation temp: -20 °C 60 °C Weight: 0.14 kg Dimensions: 47 x 41 x 40 mm Supported languages: English	Network interface:	10/100 Base-T - M12, 6-pin socket - Code A
Power consumption:≤ 5 WMobile phones support:-Default IP address:192.168.1.1Default user password:admin / -Web browser access ports:8899PC client access ports:8899Housing:Mini, MetalColor:Black"Index of Protection":1P67Operation temp:-20 °C 60 °CWeight:0.14 kgDimensions:47 x 41 x 40 mmSupported languages:English	Main features:	Auto White Balance AGC - Automatic Gain Control
Mobile phones support: Default IP address: 192.168.1.1 Default user password: 8899 PC client access ports: 8899 Housing: Mini, Metal Color: Black "Index of Protection": 1P67 Operation temp: -20 °C 60 °C Weight: Dimensions: 47 x 41 x 40 mm Supported languages: English	Power supply:	12 V DC / 600 mA
Default IP address: 192.168.1.1 Default user password: admin / - Web browser access ports: 8899 PC client access ports: 8899 Housing: Mini, Metal Color: Black "Index of Protection": IP67 Operation temp: -20 °C 60 °C Weight: 0.14 kg Dimensions: 47 x 41 x 40 mm Supported languages: English	Power consumption:	≤ 5 W
Default user password: Web browser access ports: 8899 PC client access ports: 8899 Housing: Color: Black "Index of Protection": IP67 Operation temp: -20 °C 60 °C Weight: Dimensions: 47 x 41 x 40 mm Supported languages: English	Mobile phones support:	-
Web browser access ports:8899PC client access ports:8899Housing:Mini, MetalColor:Black"Index of Protection":IP67Operation temp:-20 °C 60 °CWeight:0.14 kgDimensions:47 x 41 x 40 mmSupported languages:English	Default IP address:	192.168.1.1
PC client access ports: Housing: Mini, Metal Color: Black "Index of Protection": IP67 Operation temp: -20 °C 60 °C Weight: 0.14 kg Dimensions: 47 x 41 x 40 mm Supported languages: English	Default user password:	admin / -
Housing: Mini, Metal Color: Black "Index of Protection": IP67 Operation temp: -20 °C 60 °C Weight: 0.14 kg Dimensions: 47 x 41 x 40 mm Supported languages: English	Web browser access ports:	8899
Color: Black "Index of Protection": IP67 Operation temp: -20 °C 60 °C Weight: 0.14 kg Dimensions: 47 x 41 x 40 mm Supported languages: English	PC client access ports:	8899
"Index of Protection": IP67 Operation temp: -20 °C 60 °C Weight: 0.14 kg Dimensions: 47 x 41 x 40 mm Supported languages: English	Housing:	Mini, Metal
Operation temp: -20 °C 60 °C Weight: 0.14 kg Dimensions: 47 x 41 x 40 mm Supported languages: English	Color:	Black
Weight:0.14 kgDimensions:47 x 41 x 40 mmSupported languages:English	"Index of Protection":	IP67
Dimensions: 47 x 41 x 40 mm Supported languages: English	Operation temp:	-20 °C 60 °C
Supported languages: English	Weight:	0.14 kg
	Dimensions:	47 x 41 x 40 mm
Manufacturer / Brand: AUTONE	Supported languages:	English
	Manufacturer / Brand:	AUTONE



Code: ATE-CAM-IPC650
IP MOBILE CAMERA ATE-CAM-IPC650 - 1080p 2.8 mm AUTONE

Guarantee:	2 years
------------	---------

Front view - small sizes camera:



Side view:




Rear view:



Code: ATE-CAM-IPC650
IP MOBILE CAMERA ATE-CAM-IPC650 - 1080p 2.8 mm AUTONE



Camera mounting dimensions:

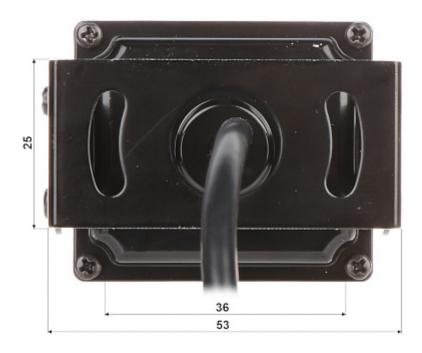

PACKAGE

Dimensions (L x W x H): 0x0x0 mm Gross Weight: 0 kg





Code: ATE-CAM-IPC650
IP MOBILE CAMERA ATE-CAM-IPC650 - 1080p 2.8 mm AUTONE