



User Manual

Code: IPC-HFW3849T1-AS-PV-0360B-S5-BLACK

IP CAMERA **IPC-HFW3849T1-AS-PV-0360B-S5-BLACK** TiOC Full-Color - 8.3 Mpx 4K UHD 3.6 mm
DAHUA

Warning!

Please read the user manual included in this work as it contains important information related with safety of installation and use of the device.

Only persons who read the user manual may use the device.

The user manual must be kept because it may be required in the future. The device is to be used exclusively for purposes specified in this user manual.

The device must be unpacked prior to starting-up. After removing the packaging make sure the device is in working order. If the product has defects, it should not be used until it is repaired.

The product is intended for use at home and commercial use and may not be used for other than intended use.

The manufacturer is not liable for damages resulting from not adhering to the rules contained in the user manual, therefore, we recommend to follow the aforementioned safety rules for operation and maintenance of the device. In this way you will ensure yourself safety and avoid causing damage to the device.

The manufacturer and the supplier are not liable for losses or damages arising out of the product, including financial or intangible losses, loss of profits, income, data, pleasure from use of the product or other products related with it - indirect, incidental or consequential loss or damage. The above provisions apply whether the loss or damage concerns:

1. Deterioration of quality or the lack of operation of the products or products related with it due to damage as well as the lack of access to the product when it is undergoing repair, which results in stoppage the loss of user's time or a break in business activity;
2. Improper results of operation of the product or products related with it;
3. It applies to losses and damages according to any legal category, including negligence and other losses, termination of a contract, expressed or implied guarantee and strict liability (even if the manufacturer or the supplier was notified about the possibility of occurrence of such damages).

Safety measures:

Particular attention at designing was directed to quality standards of the device where ensuring safety of operation is the most important factor.

The device must be secured against contact with caustic, staining and viscous fluids.

The device was designed in such a way that it restarts operation when power supply is restored after a break.

Attention! We recommend using protections to further protect the device from possible overvoltages in installations. Surge protectors are effective protection against accidental pass to the device voltages higher than the rated. Damages caused by pass the voltages higher than specified in manual, are not under warranty.

Turn off the device before transporting it.

Prior to connecting the device to a power source check whether the supplied voltage is consistent with rated voltage specified in the user manual.

Proper product disposal:

A marking of a crossed out waste bin indicates that the product may not be disposed together with other household waste in the entire EU. To avoid possible damage to the natural environment of health due to uncontrolled waste disposal, therefore, it should be handed over for recycling, propagating in this way sustainable use of natural resources.

To return a worn-out product, use a collection and disposal system of this type of equipment or contact a seller from whom it was purchased. He will then be recycled in an environmentally-friendly way.

The **DAHUA TiOC** series of cameras are modern IP cameras combining 3 innovative technologies: **Dahua Full-Color** - 24/7 color image, **Wiz-Sense** - AI artificial intelligence functions and audio-visual **active deterrence**

In addition, the camera has the function of active deterrence of intruders using flashing red and blue light and siren sound.

PoE powering possibility, compatible with the 802.3af standard makes the device more universal and easier to install.



| | |
|------------------------------------|---|
| Standard: | IP |
| Resolution: | 3840 x 2160 - 8.3 Mpx 4K UHD , 3072 x 2048 - 6 Mpx , 3072 x 1728 - 5 Mpx , 2592 x 1944 - 5 Mpx , 2688 x 1520 - 4 Mpx , 2560 x 1440 - 3.7 Mpx , 2048 x 1536 - 3 Mpx , 2304 x 1296 - 3 Mpx , 1920 x 1080 - 1080p , 1280 x 720 - 720p |
| Sensor: | 1/2.7 " Progressive Scan CMOS |
| Lens: | 3.6 mm |
| View angle: | 85 ° |
| Range of IR illumination: | 30 m |
| White light LED illuminator range: | 30 m |
| Min. illumination: | 0.004 Lux / F1.0 (color) |



User Manual

Code: IPC-HFW3849T1-AS-PV-0360B-S5-BLACK

IP CAMERA **IPC-HFW3849T1-AS-PV-0360B-S5-BLACK** TiOC Full-Color - 8.3 Mpx 4K UHD 3.6 mm DAHUA

| | |
|--------------------------------|---|
| S/N ratio: | > 56 dB |
| Memory card slot: | Micro SD card support up to 256GB |
| Image compression method: | AI H.265 / H.265+ / H.265 / AI H.264 / H.264+ / H.264 |
| Alarm inputs / outputs: | 1 / 1 |
| Audio: | <ul style="list-style-type: none">• Microphone built-in - 2 pcs,• External microphone input,• Speaker built-in• Audio output• Bi-directional audio streaming support• Audio detection |
| Main stream frame rate: | 25 fps @ 8.3 Mpx |
| Network interface: | 10/100 Base-T (RJ-45) |
| WEB Server: | Built-in |
| Max. number of on-line users: | 20 |
| ONVIF: | ✓ |
| Mobile phones support: | Port no.: 37777 or access by a cloud (P2P) <ul style="list-style-type: none">• Android: DMSS free application• iOS (iPhone): DMSS free application |
| Default IP address: | 192.168.1.108 |
| Default admin user / password: | admin / - The administrator password should be set at the first start |
| Web browser access ports: | 80, 37777 |
| PC client access ports: | 37777 |
| Mobile client access ports: | 37777 |
| Port ONVIF: | 80 |
| RTSP URL: | rtsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=0 - Main stream rtsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=1 - Sub stream |
| Intelligent image analysis: | <ul style="list-style-type: none">• intrusion - classification of people and vehicles• crossing the line (tripwire) - classification of people and vehicles• video tampering• scene changing• classification of people and vehicles |



User Manual

Code: IPC-HFW3849T1-AS-PV-0360B-S5-BLACK

IP CAMERA **IPC-HFW3849T1-AS-PV-0360B-S5-BLACK** TiOC Full-Color - 8.3 Mpx 4K UHD 3.6 mm DAHUA

| | |
|------------------------------|---|
| Main features: | <ul style="list-style-type: none">• Active deterrence function, Alternately flashing LEDs: red and blue - frequency configuration, Siren sound - 3 volume levels• WDR - 120 dB - Wide Dynamic Range• 3D-DNR - Digital Noise Reduction• ROI - improve the quality of selected parts of image• F-DNR (Defog) - Reduction of image noise caused by precipitation• Quick Pick - AI technology enabling, together with the recorder, quick identification of interesting objects (people/vehicles) based on an artificial intelligence algorithm. It allows to extract and compare the colors of clothes and vehicles• SMD 4.0 - searching for an object classified as: human, motor vehicle - increased detection distance and resistance to false alarms• AI SSA AI Smart Scene Adaptive - scene auto-adaptation using deep learning algorithms to detect environmental conditions such as rain, fog, backlight, low light and flickering, in order to set the optimal image parameters• AcuPick support - technology that uses artificial intelligence on both front-end and back-end to search through massive amounts of video data to quickly locate targets with high precision• SSA - Smart Scene Adaptive - intelligent scene adaptation by automatically adjusting the exposure parameters to obtain a better image• BLC/HLC - Back Light / High Light Compensation• Day/night mode• Full Color - colorful night mode• Auto White Balance• AGC - Automatic Gain Control• Motion Detection - max. 4 zones• Privacy zones - max. 8• Image rotation and mirror• Light and sound alarm• White light (LED) illuminator built-in : 2 LEDs |
| Power supply: | <ul style="list-style-type: none">• PoE (802.3af),• 12 V DC / 630 mA |
| Power consumption: | <ul style="list-style-type: none">• ≤ 9.4 W @ PoE• ≤ 7.7 W @ 12 V |
| Housing: | Compact - Metal |
| Color: | Black |
| "Index of Protection": | IP67 |
| Mechanical protection class: | — |
| Operation temp: | -40 °C ... 60 °C |
| Weight: | 1 kg |
| Dimensions: | 289 x 95 x 85 mm |
| Supported languages: | Polish, English, Czech, French, Spanish, Dutch, German, Russian, Portuguese, Romanian, Ukrainian, Hungarian, Italian |
| Manufacturer / Brand: | DAHUA |
| Guarantee: | 3 years |


Side view



Bottom view



Connectors

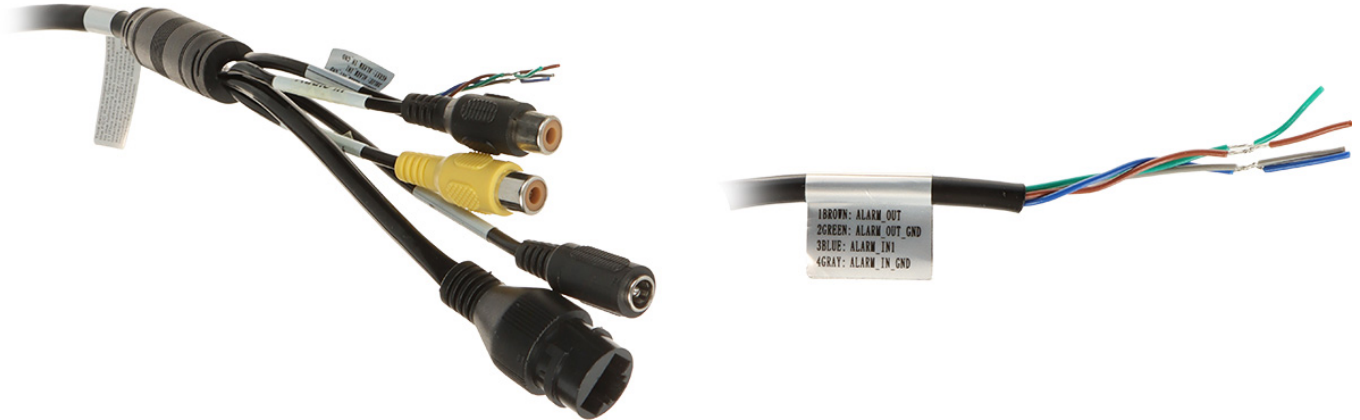


Dimensions



User Manual


Code: IPC-HFW3849T1-AS-PV-0360B-S5-BLACK

IP CAMERA **IPC-HFW3849T1-AS-PV-0360B-S5-BLACK** TiOC Full-Color - 8.3 Mpx 4K UHD 3.6 mm
DAHUA

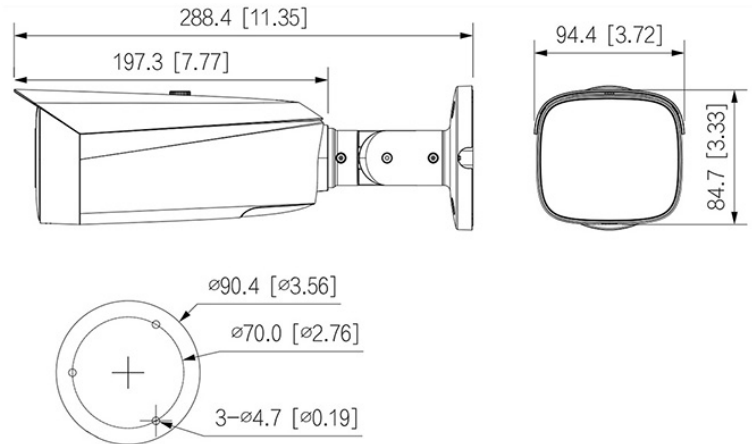

Presentation of the TiOC technology used in the camera

Example captures of device interface

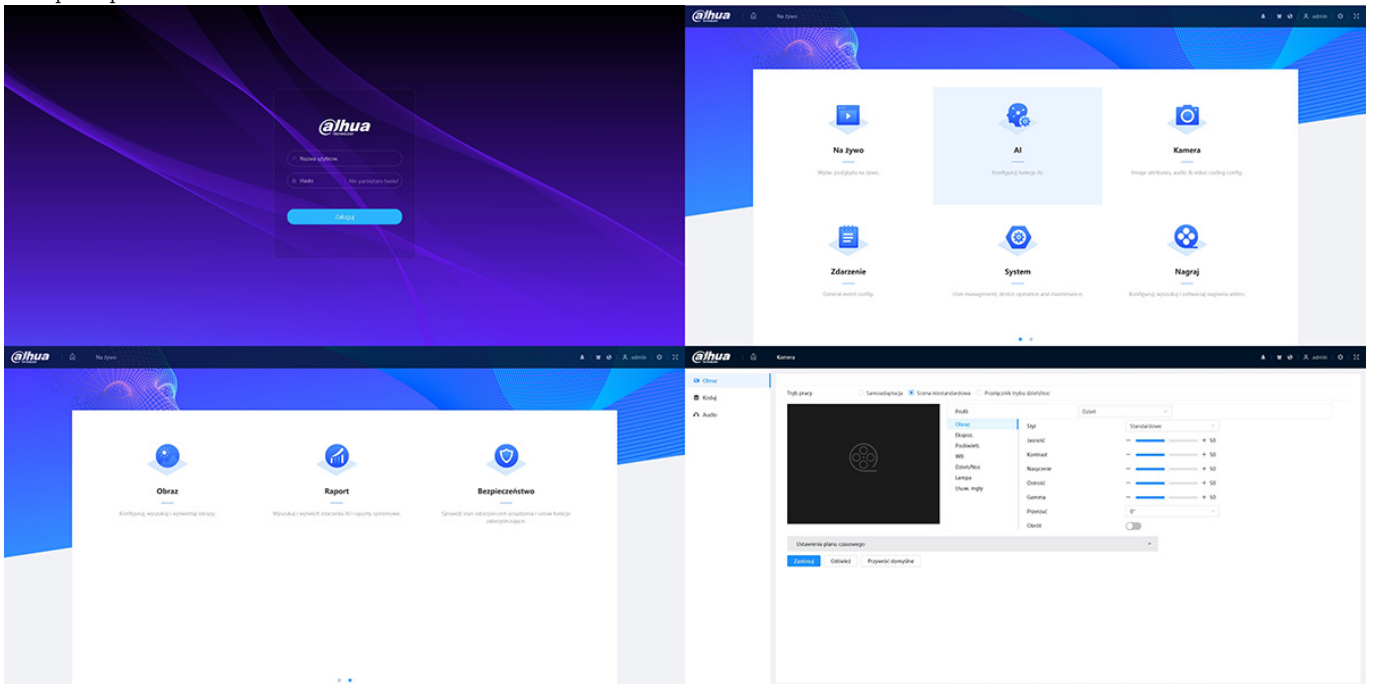

See how to initialize DAHUA cameras

In the kit



User Manual

Code: IPC-HFW3849T1-AS-PV-0360B-S5-BLACK

IP CAMERA **IPC-HFW3849T1-AS-PV-0360B-S5-BLACK** TiOC Full-Color - 8.3 Mpx 4K UHD 3.6 mm
DAHUA



PACKAGE

| | |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|