

Code: IPS-1000/24

## CONVERTER MODULE **IPS-1000/24**

Net: **36.05 EUR** Gross: **36.05 EUR**

Inverter module increasing the voltage. The IPS-1000/24 device converts the input voltage to the 230V AC value.



### SPECIFICATION


Type:	Increasing the voltage, DC/AC
Power voltage:	21 V ... 31 V DC
Input current:	max. 45 A
Output voltage:	225 V ... 235 V AC
Output voltage adjustment:	—
Power:	1000 W (max) 700 W (continuous operation)
Efficiency:	82 % (at full load)
Protections:	<ul style="list-style-type: none"><li>• Short-circuit</li><li>• Overload</li><li>• Overheat</li></ul>
Weight:	1.3 kg
Dimensions:	225 x 159 x 68 mm
Guarantee:	2 years

### PRESENTATION

Connectors:



Top view:

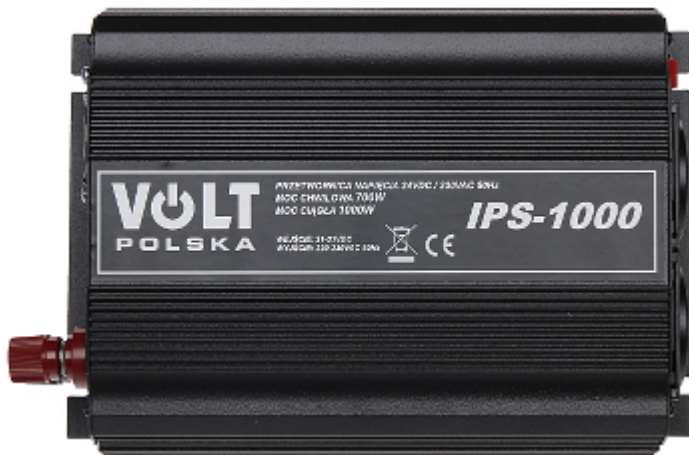

Mounting dimensions:




In the kit:



## OUR TESTS

Approximation to a sine wave at the device output:

**Pout=0W**

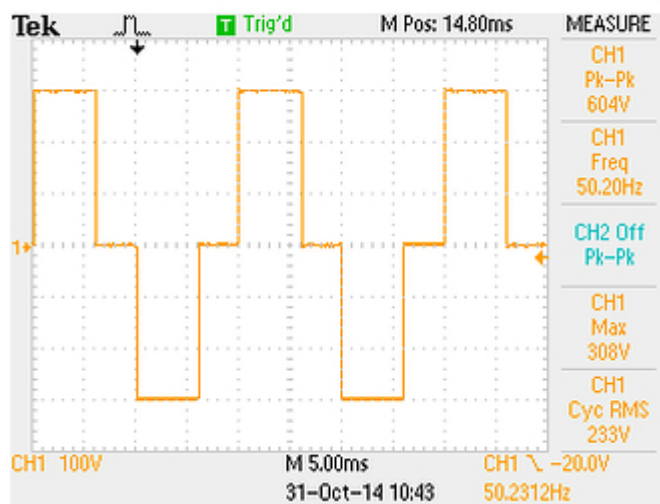

## OUR OPINIONS



- Note! Do not connect to the device inductive and capacitive loads such as: power tools, household appliances, power transformers, pumps, etc.
- The fan used is quite noisy.

## PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
 POL; 60-713 Poznań; Graniczna 10  
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60