

Code: HA-129R65

AMPLIFIER WITH ACTIVE RETURN CHANNEL **HA-129R65** TERRA

Net: **224.95 PLN** Gross: **224.95 PLN**



SPECIFICATION

Frequency range:	47 MHz ... 862 MHz
Gain :	• 24 dB ... 27 dB • 32 dB ... 36 dB selectable by switch
Gain adjustment:	17 dB
Slope adjustment:	17 dB
Maximal output level IMD3=60 dB DIN45004B:	100 dB μ V
S/N ratio:	$\leq$ 8.5 dB

Return channel:

Frequency range:	5 MHz ... 65 MHz
Gain :	18 dB ... 21 dB
Gain adjustment:	15 dB
Maximal output level IMD3=60 dB DIN45004B:	114 dB μ V
S/N ratio:	$\leq$ 6 dB

General information:

Number of inputs/outputs:	1 / 1 + 1 (1 x test: -30dB)
Power supply:	230 V AC
Power consumption:	$\leq$ 4 W
Operation temp:	-20 °C ... 50 °C
Weight:	0.23 kg
Dimensions:	133 x 63 x 39 mm


DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Manufacturer / Brand:	TERRA
Guarantee:	2 years

PRESENTATION



Top view:

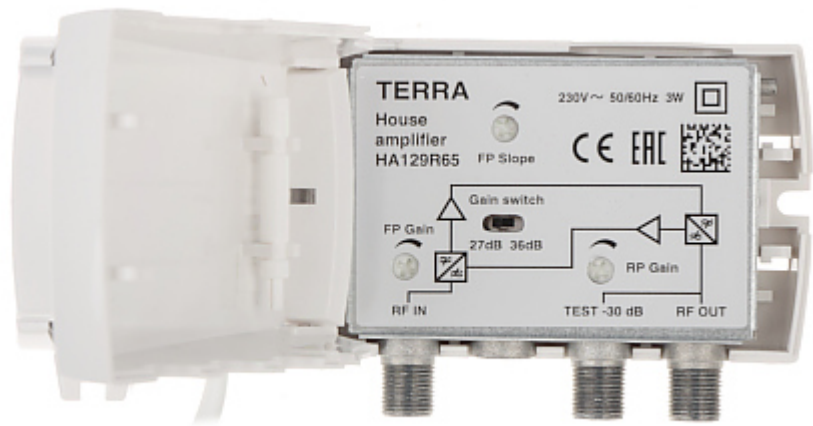

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

