

Code: CA-64-EPS

EXPANDER **CA-64-EPS** 8 INPUTS SATEL

Net: **194.00 PLN** Gross: **194.00 PLN**

The CA-64-EPS expander enables extension the system with 8 wired inputs operating NO, NC, EOL, 2EOL/NO, 2EOL/NC configurations. Thanks to analyzing the signals from inputs, it is possible to directly connect rollerblinds detectors and vibration detectors. The CA-64-EPS is equipped with a back-up power supply (capacity 1.2 A) ensuring additional power to supply alarm system elements.

This device is dedicated for INTEGRA/VERSA alarm control panels.




SPECIFICATION


Number of inputs:	8 pcs - programmable
Support configurations:	NO, NC, EOL, 2EOL/NO, 2EOL/NC
Current consumption from battery (standby):	70 mA
Maximal current consumption from battery:	100 mA
Battery charging current:	350 / 700 mA
Recommended transformer type:	TR40VA (40VA / 18VAC)
Output voltage:	9.5 ... 13.8 V DC
Main features:	• Vibration detectors and rollerblinds detectors support • programmable EOL resistance value • switching power supply adapter 1.2A
Power supply:	18 V AC
Operation temp:	-10 °C ... 55 °C
Weight:	0.08 kg
Dimensions:	140 x 68 mm
Manufacturer / Brand:	SATEL
Guarantee:	2 years

PRESENTATION

Top view:

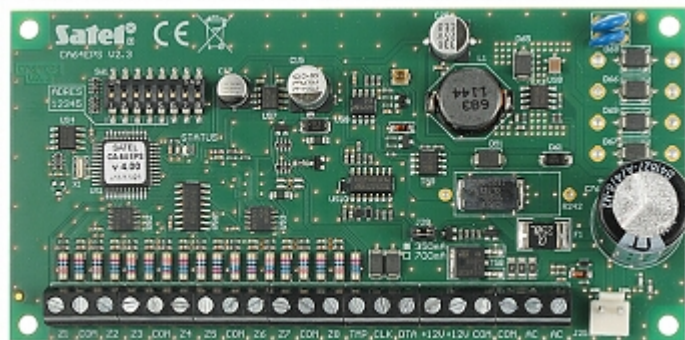

In the kit:

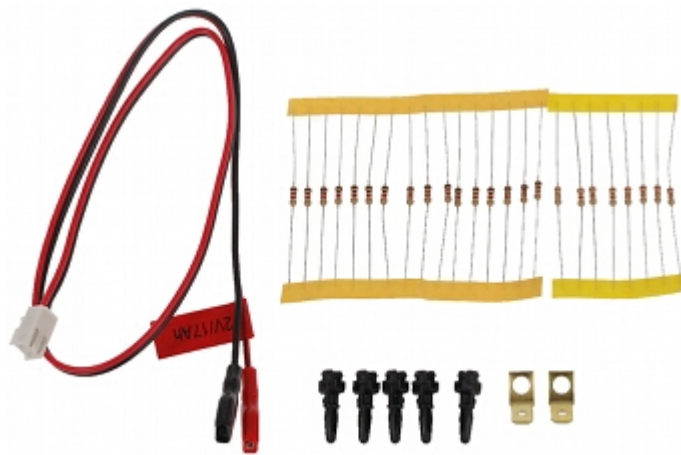

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------