

Code: VERSA-PLUS/EN

ALARM CONTROL PANEL **VERSA-PLUS/EN** SATEL

Net: 850.00 PLN Gross: 850.00 PLN

The VERSA-PLUS/EN alarm control panel is intended for security of small and medium-sized facilities, offering comprehensive functionality in the field of security systems. The device has the possibility of wired and wireless extensions, and advanced communication features available through a dedicated GSM/GPRS and TCP/IP communicators.



SPECIFICATION


Mainboard inputs:	4 pcs
Mainboard outputs:	5 pcs
Maximal number of supported inputs:	30 pcs
Maximal number of supported outputs:	12 pcs
Current-carrying capacity, low-current programmable outputs:	50 mA
Current-carrying capacity, high-current programmable outputs (+/-10%):	1.1 A - 2 pcs
Maximal load:	2 A
Users + admins:	30 + 1
Partitions:	—
Zones:	2
Expansion modules:	max. 6
Events memory:	2047
Timers:	4
Supported keypads:	max. 6 pcs
Supporting the wireless ABAX system via bus:	✓
Keyboard included:	—
Enclosure included:	✓

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Protection class (Grade):	2
Power supply:	18 V AC / 200 mA
Operation temp:	-10 °C ... 55 °C
Permissible relative humidity:	93 %
Dimensions:	173 x 106 mm - PCB 282 x 262 x 97 mm - Housing
Weight:	1.25 kg (with enclosure and accessories)
Supported languages:	English
Manufacturer / Brand:	SATEL
Guarantee:	2 years

PRESENTATION


Control panel mainboard:

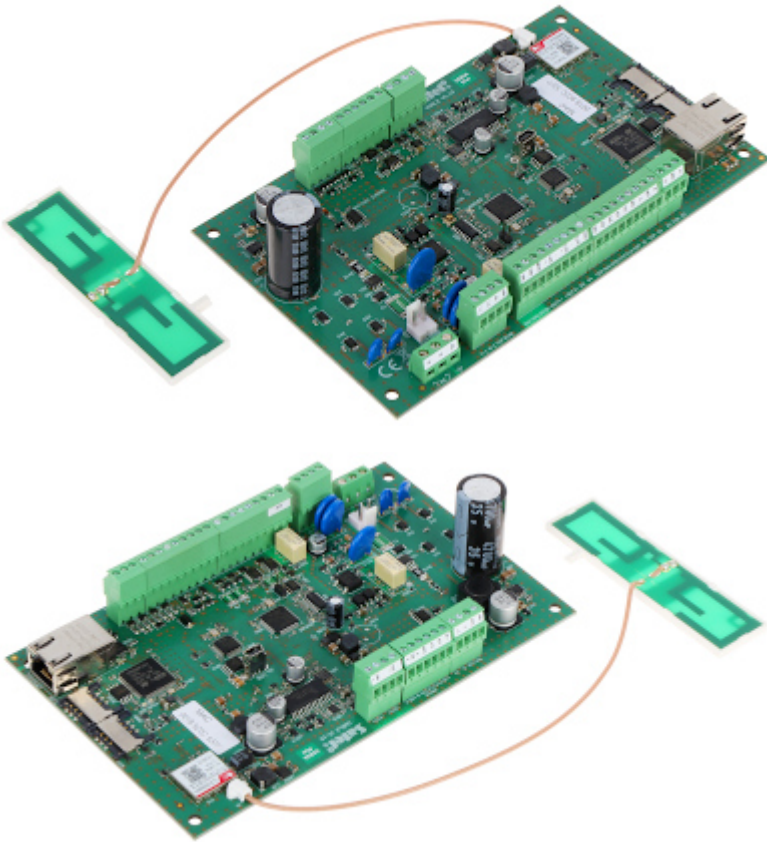

The kit includes an enclosure designed for mounting the panel module, as well as separately available battery (7Ah - 12V/7.2AH-MW) and transformer:



Internal view of the housing:

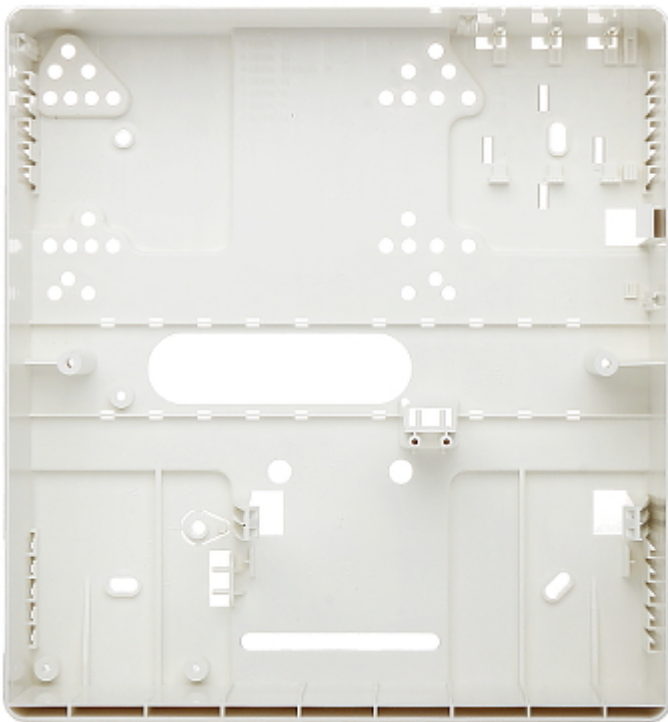


Mounting side view:





In the kit:

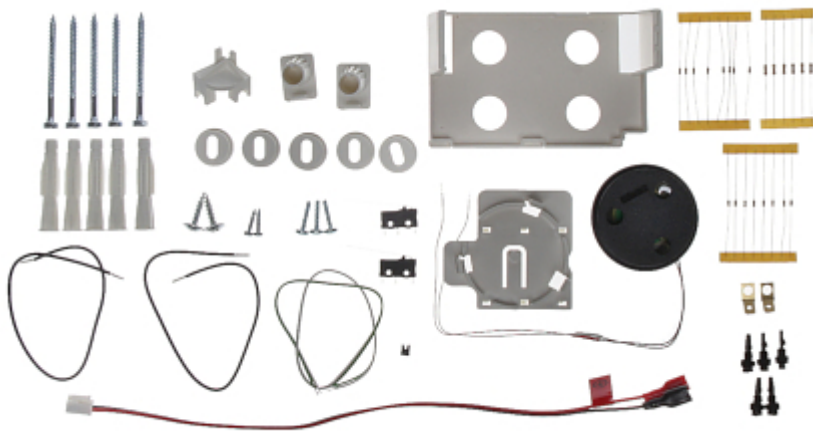

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60