

Code: MXD-300

MULTIPURPOSE WIRELESS DETECTOR **MXD-300** SATEL

Net: 29.22 EUR Gross: 29.22 EUR

The MXD-300 detector is a multifunctional device that can work as: magnetic, magnetic with roller shutter input, shock, shock and magnetic, water flood detector.

The detector working with MICRA alarm control panel based on software version 2.02 or later.

Attention! The detector is sold without the FPX-1 flood probe, which is available separately in our offer.



SPECIFICATION

Detection:	<ul style="list-style-type: none">• Opening the door or window,• Shocks, Vibrations,• Water
Frequency band:	433.05 MHz ... 434.79 MHz
Radio communication range (at open area):	≤ 600 m - PERFECTA ≤ 500 m - VERSA-MCU / MTX-300 / MICRA ≤ 300 m - MRU-300
Support:	Satel MICRA
Alarm signaling:	<ul style="list-style-type: none">• Signal to control panel• LED indicator
Tamper contact:	✓
Battery:	CR123A 3 V (included)
Backup time:	max. 2 years
Current consumption:	≤ 22 mA
Protection class (Grade):	2
Environmental class EN 50130-5:	II
Main features:	<ul style="list-style-type: none">• detecting the presence of water in spaces where there is a risk of leakage• detection of shocks and vibrations accompanying attempts to force a door or window open• detection of opening doors, windows, etc. (magnetic detector)• input for connecting a NC type wired detector• input for connecting a wired roller shutter detector• battery diagnostics• Encrypted radio communication in the 433 MHz frequency band• Tamper detection - opening the enclosure, removing from mounting surface


DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Operation temp:	-10 °C ... 55 °C
Permissible relative humidity:	93 ± 3 %
Color:	White
Weight:	0.04 kg
Dimensions:	24 x 110 x 27 mm
Manufacturer / Brand:	SATEL
Guarantee:	2 years

PRESENTATION



Internal view:

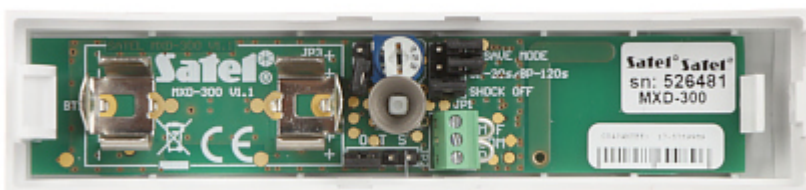

Mounting side view:





In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------