

Code: DS-PD2-D12-W

WIRELESS DUAL TECHNOLOGY MICROWAVE + PIR DETECTOR **DS-PD2-D12-W** Hikvision

Net: 392.00 PLN Gross: 392.00 PLN

Wireless motion detector, which is designed to detect the moving intruder within the system protected area. With a combination of PIR and MW detection was reached high immunity to false alarms. It is perfect to create surveillance system in small-size buildings, such as e.g.: kiosks, summer houses, boutiques, freestanding garages and workshops, and wherever conducting wire installation is difficult or impossible to perform.
The DS-PD2-D12-W supports the other devices compatible with wireless Pyronix system.



SPECIFICATION


Support:	Wireless alarm systems HIKVISION AX / PYRONIX Enforcer
Frequency band:	868 MHz
Radio communication range (at open area):	max. 800 m
PIR detection range:	12 m / 85 °
Microwave frequency band:	10.515 MHz
Power supply:	2 x 3 V Battery type : CR123A
Battery working time (in energy saving mode):	~ 2 years
Target speed range:	0.3 ... 3 m/s
Digital temperature compensation:	✓
Pet immunity:	—
Recommended installation height:	1.8 ... 2.4 m
Main features:	<ul style="list-style-type: none">• Passive Infra Red (PIR) and microwave (MW)• PIR / MW detection sensitivity adjustment• Quick pairing of the detector with the alarm control panel using a single button• With a combination of PIR and MW detection was reached high immunity to false alarms• Tamper detection - opening the enclosure, removing from mounting surface
Operation temp:	-10 °C ... 40 °C
Color:	White

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Dimensions:	117 x 69 x 59 mm
Weight:	0.161 kg
Manufacturer / Brand:	Hikvision
SAP Code:	302401119
Guarantee:	2 years

PRESENTATION

Internal view:


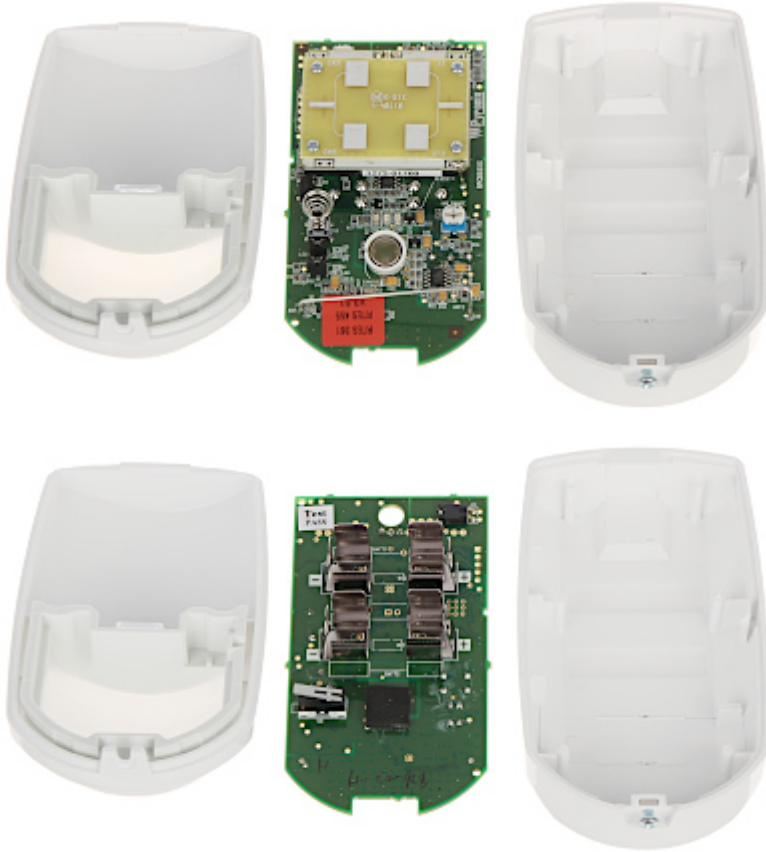


Mounting side view:





Detector range:

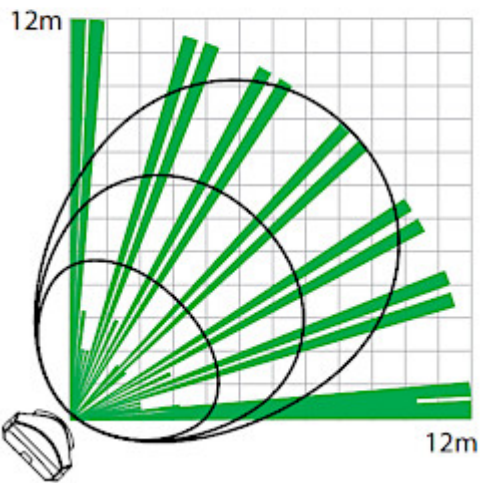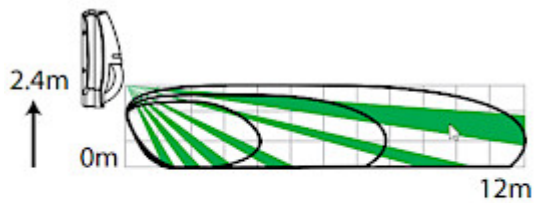

In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

