

Code: LE-411708

# RESIDUAL CURRENT CIRCUIT BREAKER **LE-411708** THREE-PHASE, AC TYPE 30 mA 40 A LEGRAND

Net: **47.44 EUR** Gross: **47.44 EUR**

Residual current circuit breaker with rated sensitivity of  $I_{\Delta n} = 30\text{mA}$ , AC type. The LE-411708 circuit breaker is compatible to DIN TS-35 rail mounting system.




## SPECIFICATION

Device type:	Residual current circuit breaker, Three-phase, AC type
Rated sensitivity:	30 mA
Rated current:	40 A
Number of poles:	4
Breaking capacity:	10000 A
Rated voltage:	400 V AC / 50 Hz
Connectors type:	screw terminals
Main features:	<ul style="list-style-type: none"><li>• Can be equipped with DX3 series signalling and remote tripping auxiliaries and motorised controls</li><li>• Provided space for a label with description</li><li>• Can be connected with using the supply busbars fork-type or prong-type</li></ul>
Housing:	Plastic, DIN, TS-35 rail mounting
Width in 17.5 mm modules:	4
Weight:	0.310 kg
Dimensions:	71 x 83 x 75 mm
Manufacturer / Brand:	LEGRAND
Guarantee:	2 years


## PRESENTATION

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

Front view:

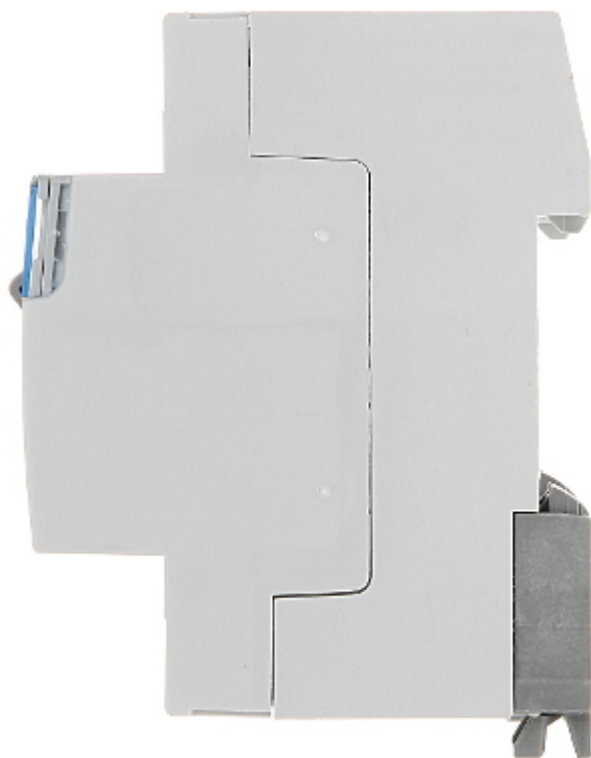

Mounting side view:

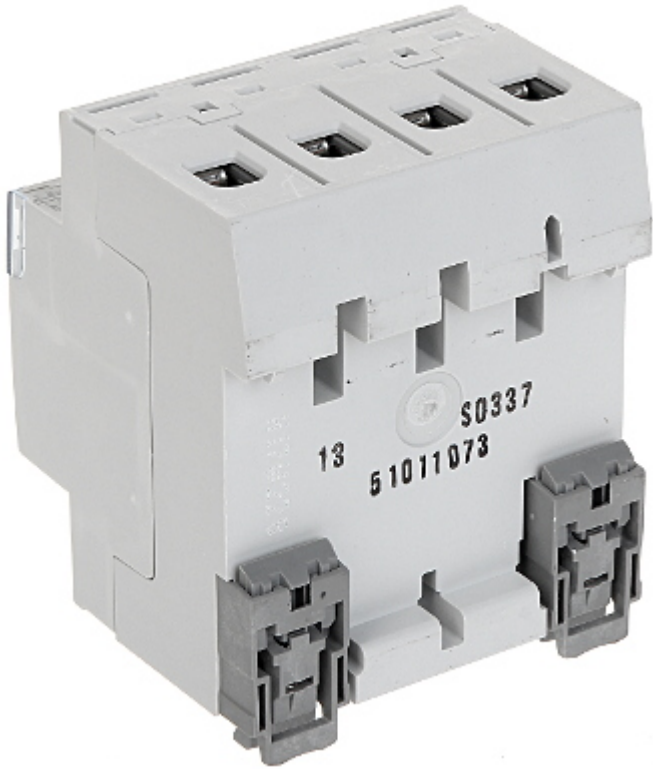

Bottom view:



**PACKAGE**

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60