

Code: ATLO-B1-TUYA

SMART SWITCH **ATLO-B1-TUYA** Wi-Fi, Tuya Smart

Net: **25.42 PLN** Gross: **31.27 PLN**

The ATLO-B1-TUYA Wi-Fi Smart Switch allows you to control the devices connected to it using the mobile application. For proper functioning of the device, it is necessary to connect it to the Wi-Fi network with Internet access.

Beyond direct control, the device has the ability to program the on and off schedule and linking to different system events. Voice control allows you to control the device via voice commands from Amazon Alexa or the Google Assistant (Internet access required).

Tuya is an international home automation platform that connects thousands of products made by different manufacturers. The system can support all the most popular communication protocols such as Wi-Fi, Zigbee, Bluetooth.

Attention! Controlling the device and schedule settings is possible if the device has access to the Internet.



SPECIFICATION

Rated voltage:	100 ... 240 V
Maximal total load:	2400 W
Total maximal current:	10 A
Number of inputs:	1
Number of outputs:	1
Connector type:	screw terminals
Grounding:	—
Wireless:	Wi-Fi, 2.4 GHz - IEEE 802.11 b/g/n
Mobile phones support:	<ul style="list-style-type: none">• The Tuya Smart free application on Android• The Tuya Smart free application on iOS
Main features:	<ul style="list-style-type: none">• schedule,• timer,• remote access,• voice control• Pairing button• Wi-Fi indicator
Housing:	Plastic
Color:	White
Operation temp:	-20 °C ... 50 °C
Permissible relative humidity:	≤ 80 %
Weight:	0.04 kg
Dimensions:	88 x 40 x 25 mm
Guarantee:	2 years

PRESENTATION

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60




Connectors:





Top view:

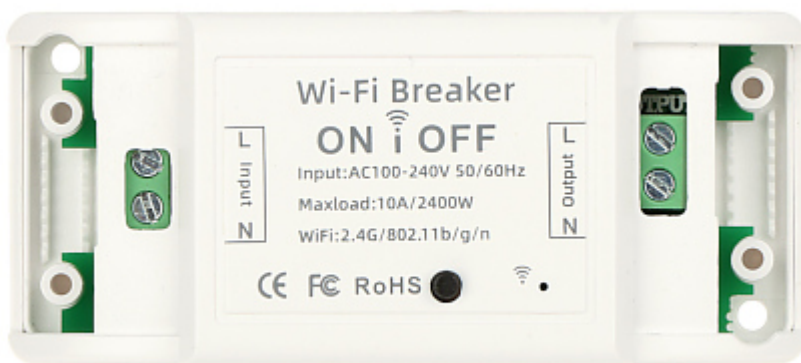

PACKAGE

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

