

Code: IPS-1000/24

CONVERTER MODULE **IPS-1000/24**

Net: **34.07 EUR** Gross: **41.91 EUR**

Inverter module increasing the voltage. The IPS-1000/24 device converts the input voltage to the 230V AC value.



SPECIFICATION

Type:	Increasing the voltage, DC/AC
Power voltage:	21 V ... 31 V DC
Input current:	max. 45 A
Output voltage:	225 V ... 235 V AC
Output voltage adjustment:	<input type="checkbox"/>
Power:	1000 W (max) 700 W (continuous operation)
Efficiency:	82 % (at full load)
Protections:	<ul style="list-style-type: none">• Short-circuit• Overload• Overheat
Weight:	1.3 kg
Dimensions:	225 x 159 x 68 mm
Guarantee:	2 years

PRESENTATION

Connectors:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Top view:



Mounting dimensions:




In the kit:



OUR TESTS

Approximation to a sine wave at the device output:

P_{out}=0W

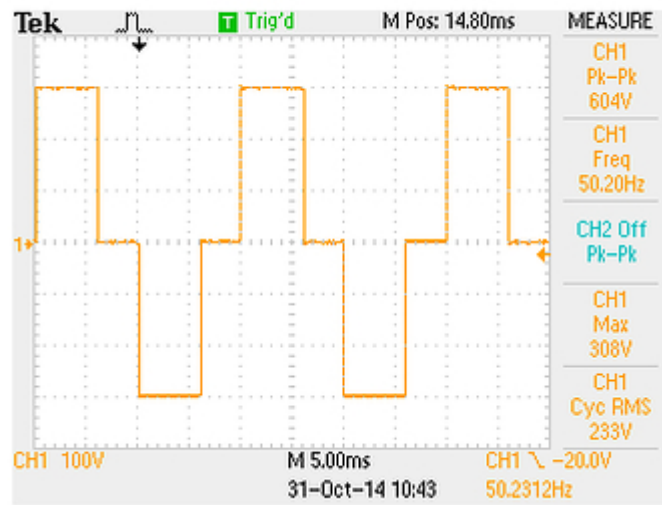

OUR OPINIONS



- Note! Do not connect to the device inductive and capacitive loads such as: power tools, household appliances, power transformers, pumps, etc.
- The fan used is quite noisy.