

Code: IPS-500/24

CONVERTER MODULE **IPS-500/24**

Net: **31.80 EUR** Gross: **31.80 EUR**

Inverter module increasing the voltage. The IPS-500/24 device converts the input voltage to the 230V AC value.



SPECIFICATION

| | |
|----------------------------|---|
| Type: | Increasing the voltage, DC/AC |
| Power voltage: | 21 V ... 31 V DC |
| Input current: | max. 23 A |
| Output voltage: | <ul style="list-style-type: none">• 225 V ... 235 V AC,• 5 V DC - USB |
| Output voltage adjustment: | — |
| Power: | 500 W (max) 350 W (continuous operation) |
| Efficiency: | 82 % (at full load) |
| Protections: | <ul style="list-style-type: none">• Short-circuit• Overload• Overheat |
| Weight: | 0.67 kg |
| Dimensions: | 164 x 105 x 60 mm |
| Guarantee: | 2 years |

PRESENTATION

Connectors:




Top view:



Mounting dimensions:

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

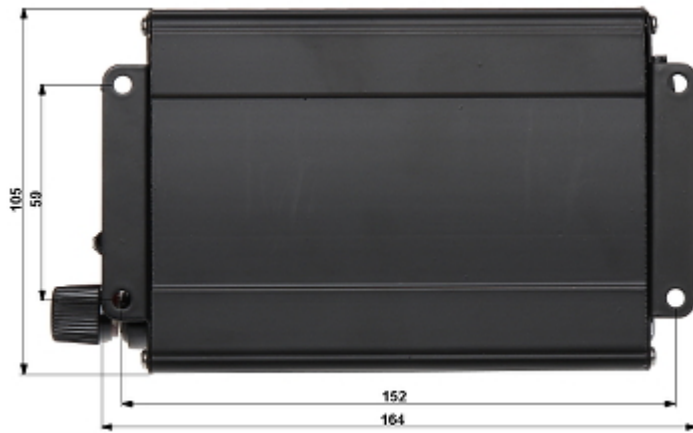


In the kit:



OUR TESTS

Approximation to a sine wave at the device output:

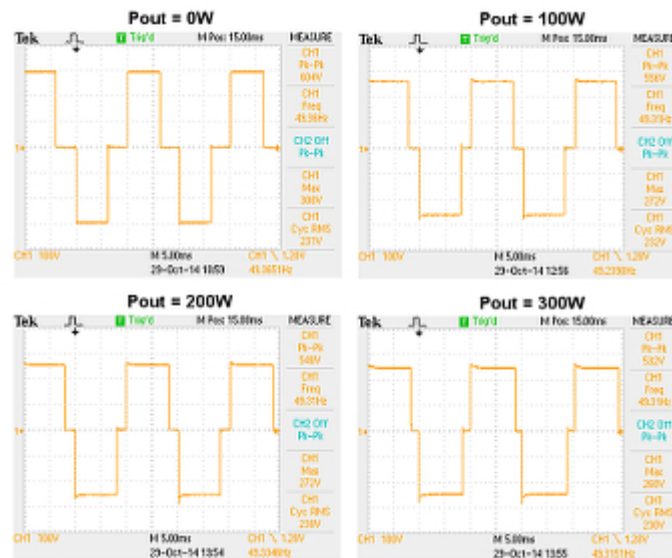

OUR OPINIONS



- Note! Do not connect to the device inductive and capacitive loads such as: power tools, household appliances, power transformers, pumps, etc.
- The fan used is quite noisy.

PACKAGE

Dimensions (L x W x H): 0x0x0 mm Gross Weight: 0 kg

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60