

Code: MC16-PAC-ST-1

## ACCESS CONTROLLER MODULE **MC16-PAC-ST-1** ROGER

Net: **193.13 EUR** Gross: **237.55 EUR**

The MC16-PAC-ST-1 controller is a multifunctional electronic module, intended for use in the RACS 5 v2 system, which enables the implementation of access control of the transition and building automation.




### SPECIFICATION

Number of served transitions:	1 (two-way)
Number of supported readers:	4
Number of users:	unlimited (purchase of the appropriate license required)
Number of media per ID:	8 - Proximity card, PIN code, fingerprint, etc.
Buffer memory:	8 000 000 events buffer
Number of access zones:	2
Number of alarm zones:	2
Battery backup support:	12 V / 7 Ah
Communication:	<ul style="list-style-type: none"><li>• Ethernet - RJ-45 socket</li><li>• RACS 5 v2 (Roger)</li><li>• RS-485 interface</li></ul>
Main features:	<ul style="list-style-type: none"><li>• Integrated support in VISO ST software</li><li>• Functions in the VISO ST system:<ul style="list-style-type: none"><li>- MSSQL database</li><li>- work in distributed systems</li><li>- multi-station work</li><li>- monitoring of transitions with video preview</li><li>- T&amp;A event reporting</li><li>- maximum number of transitions in the system : 128</li></ul></li></ul>
Power supply:	<ul style="list-style-type: none"><li>• 17 ... 22 V AC</li><li>• 10 ... 15 V DC</li><li>• 22 ... 26 V DC</li></ul>
Operation temp:	5 °C ... 40 °C
Permissible relative humidity:	10 % ... 95 % (non-condensing)
Weight:	0.14 kg
Dimensions:	175 x 72 x 30 mm
Manufacturer / Brand:	ROGER
Guarantee:	<b>3 years</b>

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60


## PRESENTATION

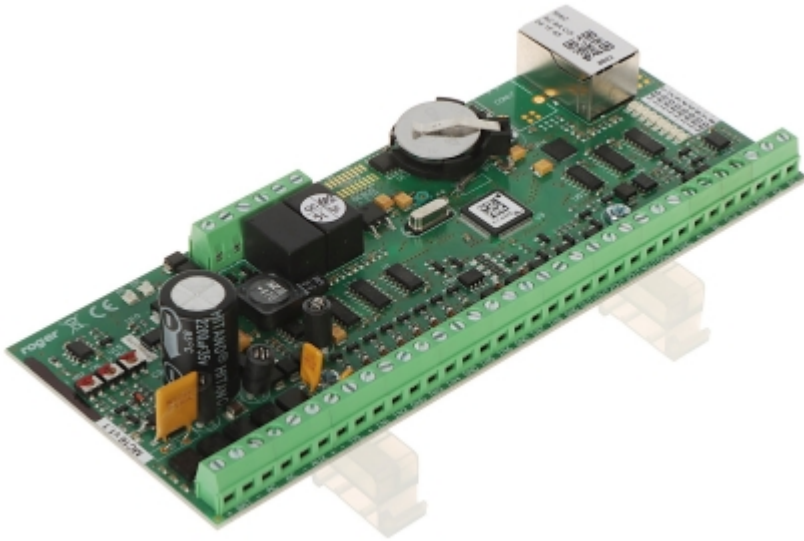


Top view:




Connectors:

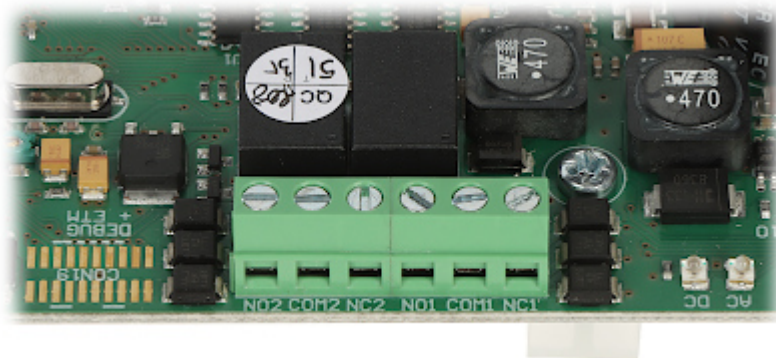


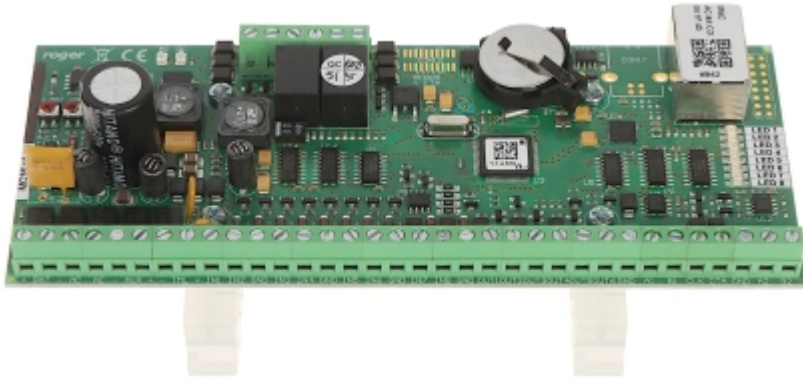

Mounting side view:

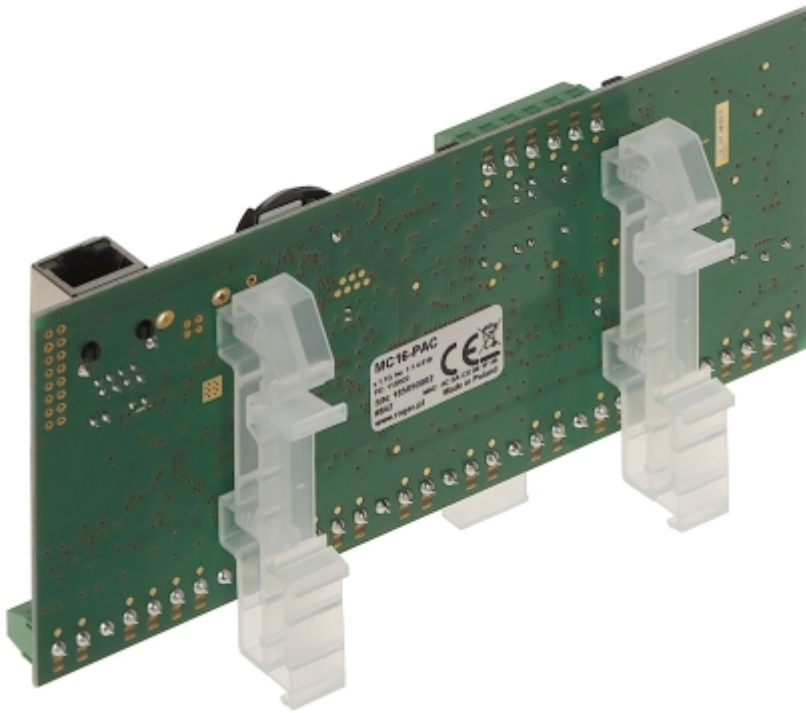

In the kit:

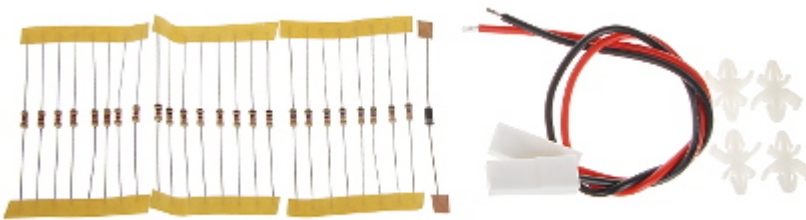

## PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------