

Code: ATE-G1CH

ACCESS POINT 4G LTE +ROUTER **ATE-G1CH** 150Mb/s

Net: **399.36 PLN** Gross: **491.21 PLN**

The ATE-G1CH Wireless Router, operating in accordance with the 802.11 b/g/n standard, allows to share a network connection between several users in areas that are covered by 3G/4G signal.

The router is intended for use in CCTV monitoring by enabling access to Wi-Fi cameras using smartphones and other mobile devices with access to 3G / 4G / LTE networks.

The device does not require any additional configuration, it is ready to use immediately after placing the SIM card inside and connecting the power supply.

The device can be installed outdoors.



SPECIFICATION

Frequency range:	2.4 GHz
Antenna type:	<ul style="list-style-type: none">• Omnidirectional antenna Wi-Fi - 5 dBi,• 2 x Omnidirectional antenna 4G LTE
Standards:	IEEE 802.11 b/g/n, 4G LTE, 3G
Baud rates:	11n : 150 Mbps 11g : 54 Mbps 11b : 11 Mbps LTE : 150 / 50 Mbps
LAN ports:	1 x 10/100 Mbps - LAN
Network type:	<ul style="list-style-type: none">• 4G : FDD-LTE, WCDMA/HSPA+ B1/B3/B5/B7/B8/B20 - 2100 / 1800 / 2600 / 900 / 800 / 700 MHz• 4G : TDD-LTE B38/B40/B41 - 2600 / 2300 / 2500 MHz• 3G : UMTS/HSPA+ - 2100 / 900 MHz
LTE:	✓
QSS:	—
WDS:	—
DHCP server:	✓
Protections:	<ul style="list-style-type: none">• WPA-PSK/WPA2-PSK• SSID hiding• MAC addresses filtering
Management interface:	Web browser


DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Main features:	<ul style="list-style-type: none"> • SIM socket • DHCP client/server support • DHCP client list • Static routing • Default address : 192.168.100.1
Power supply:	12 V DC / 2 A (power adapter included)
Operation temp:	0 °C ... 40 °C
Permissible relative humidity:	10 % ... 90 % (non-condensing)
"Index of Protection":	IP66
Weight:	0.16 kg
Dimensions:	132 x 132 x 50 mm
Manufacturer / Brand:	AUTONE
Guarantee:	2 years


PRESENTATION

Internal view of the housing:

The internal antenna should be stuck to the front part of the housing:

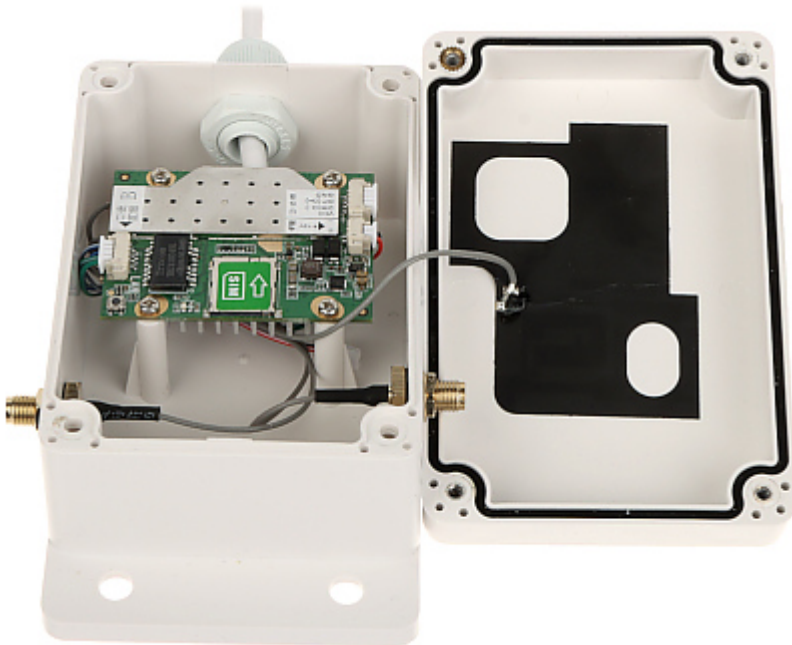

SIM socket:

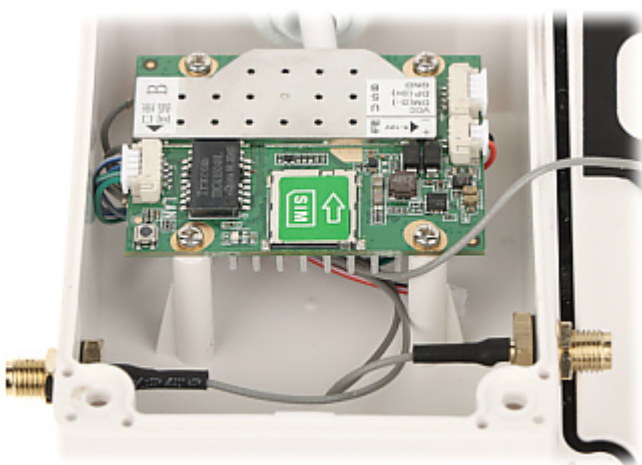

Antenna connector:



Device connectors:



Power adapter included:



Additionally included:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

