


Code: LNA-188

## ANTENNA PREAMPLIFIER **LNA-188** 6-60 30dB

Net: **8.84 EUR** Gross: **8.84 EUR**

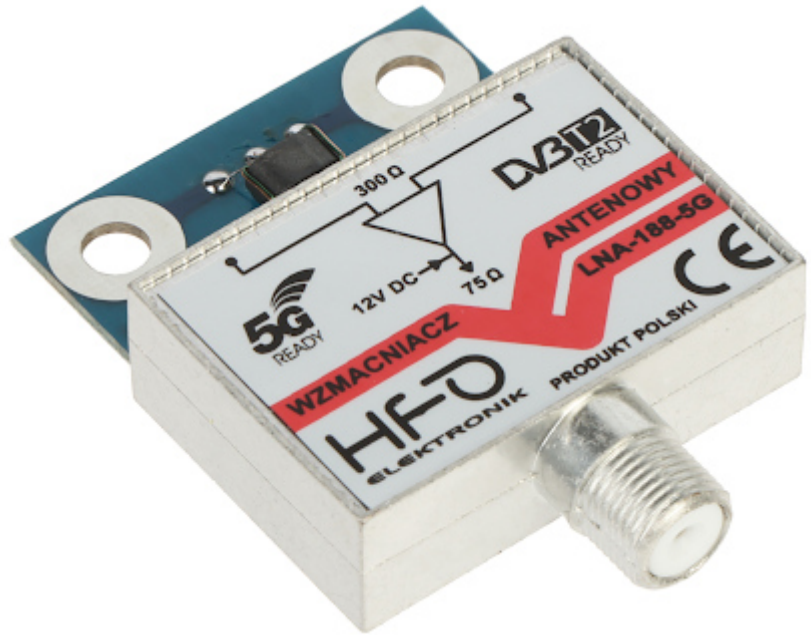


Broadband board amplifier to antenna box.

### SPECIFICATION


Range:	174 MHz ... 790 MHz
Channels:	6 - 12 21 - 60
Gain :	13 ... 30 dB
CH6 - CH12 amplification:	13 dB ... 15 dB
Gain K21 - K43:	25 dB ... 30 dB
Gain K43 - K55:	30 dB
Gain K55 - K60:	30 dB ... 20 dB
Number of outputs [connectors type]:	1 pcs (F connector)
Number of inputs [connectors type]:	1 pcs (antenna terminals)
Maximum output level:	98 dB $\mu$ V
Ripples:	<ul style="list-style-type: none"><li>• 3.0 dB @ 174 ... 230 MHz</li><li>• 2.8 dB @ 470 ... 790 MHz</li></ul>
Input/output impedance:	300 $\Omega$ / 75 $\Omega$
Power supply:	12 V / 55 mA via antenna cable
Shielding:	✓
Weight:	0.024 kg
Dimensions:	55 x 40 x 12 mm
Guarantee:	2 years

### PRESENTATION

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

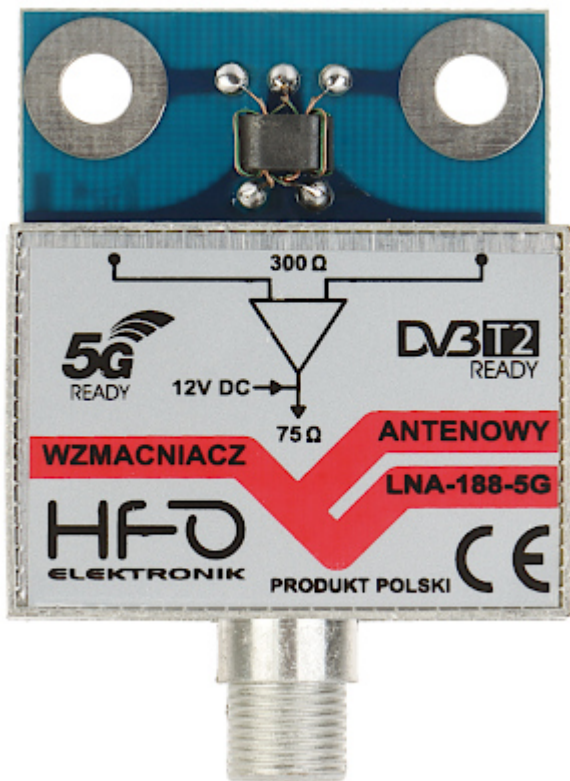

Amplitude - frequency response:

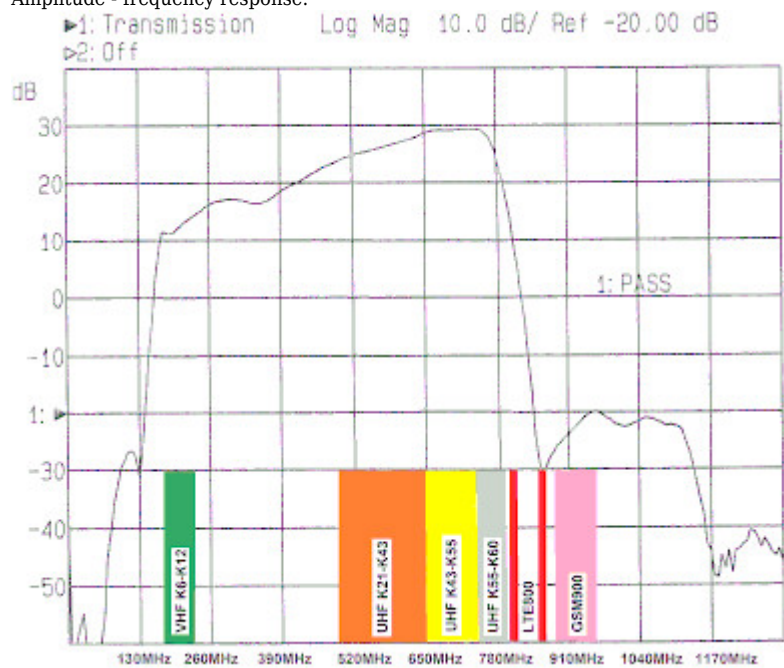

**PACKAGE**

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------