

Code: MRP-508

## MULTISWITCH **MRP-508** 5 INPUTS/8 OUTPUTS SIGNAL

Net: **33.60 EUR** Gross: **41.33 EUR**




**Attention!** For unloaded outputs, use 75  $\Omega$  terminating resistors.

### SPECIFICATION

Inputs:	4x 950 MHz ... 2150 MHz 1x 5 MHz ... 862 MHz
Outputs:	8x 47 MHz ... 2150 MHz
Switching signals:	13 V / 18 V 0 Hz / 22 kHz
SAT Tap loss:	3 dB
TV Tap loss:	14 dB $\pm$ 1.5 dB
Maximal output level SAT:	100 dB $\mu$ V
Maximal output level TV:	100 dB $\mu$ V
Pre-amplifiers powering:	12 V DC
Power supply:	18 V DC / 1 A (power adapter included)
Dimensions:	148 x 121 x 45 mm
Weight:	0.3 kg
Manufacturer / Brand:	SIGNAL
Guarantee:	2 years

### PRESENTATION

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

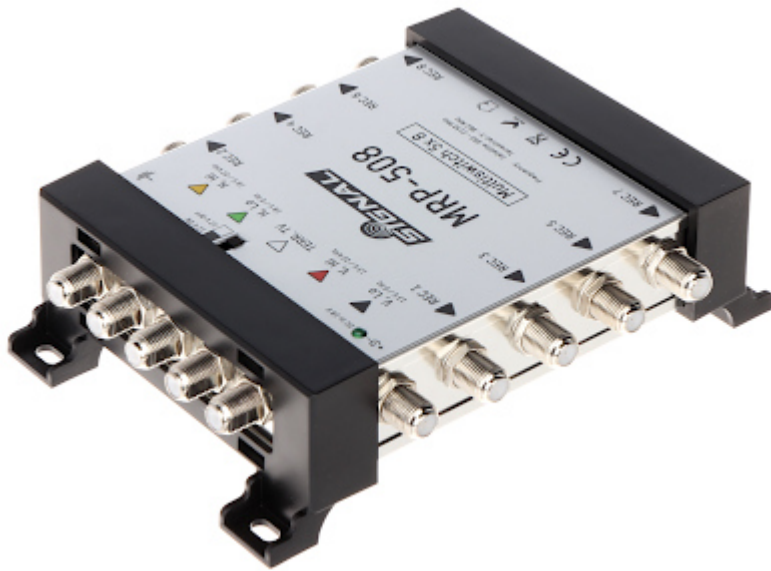

In the kit:

