

Code: TF-007A

FILTER LTE TF-007A

Net: 37.01 EUR Gross: 37.01 EUR

The TF-007A filter is used to suppress LTE signals that may cause interference in terrestrial TV installations.



SPECIFICATION

Working frequency band:	5 ... 1000 MHz
Stop-band:	240 ... 470 MHz 694 ... 3000 MHz
Return loss:	> 23 dB @ 350 MHz > 25 dB @ 703 MHz > 25 dB @ 733 MHz > 35 dB @ 1000 MHz
Insertion loss:	< 0.3 dB @ 5 MHz < 2 dB @ 240 MHz < 3 dB @ 470 MHz < 4 dB @ 694 MHz
Main features:	• It is equipped with 24V/100mA DC pass • Shielded • F type connectors • Mast mounting diameter
Weight:	0.17 kg
Dimensions:	89 x 107 x 43 mm
Guarantee:	2 years

PRESENTATION

Internal view of the housing:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60




Housing:



Mast mounting diameter:




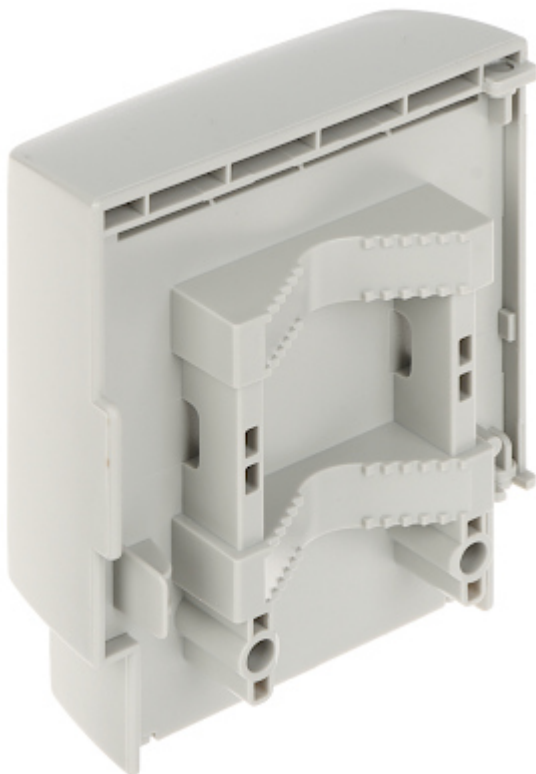

In the kit:



Filter frequency response:

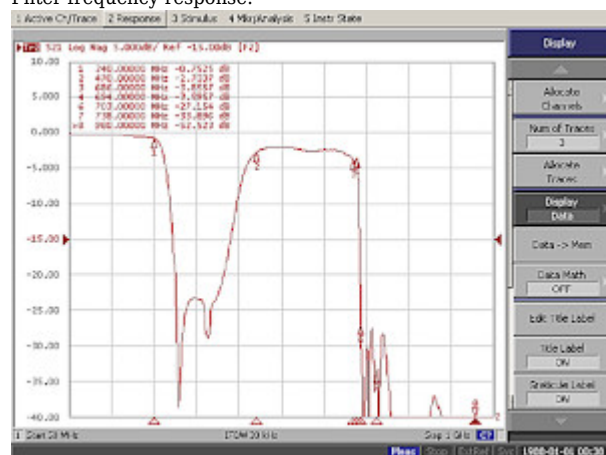

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60