

Code: LR1002-1EC-V3

EXTENDER ETHERNET+PoE **LR1002-1EC-V3** RECEIVER DAHUA

Net: **55.99 EUR** Gross: **55.99 EUR**

The LR1002-1EC-V3 extender allows to increase a distance of transmission of the data and PoE 802.3 at/af, ePoE powering via coaxial cable.

The device operates from the PoE switch side.

WARNING! The PoE power is supplied together with data on pairs 1, 2 and 3, 6. The extender does not work with Passive POE switches, power adapters and patch panels. The extender also does not work with switches supplying power over free pairs (wires 4, 5 and 7, 8).




SPECIFICATION

LAN ports:	1 pcs RJ45
Transmission ports:	1 pcs BNC
Transmission speed:	10 / 100 Mbps
Transmission range:	max. 1000 m @ 10 Mbps , max. 400 m @ 100 Mbps The range of data transfer and power supply is strongly dependent on the cable used and the power required to supply the receiver
Protections:	Overvoltage
Main features:	<ul style="list-style-type: none">• Plug & Play• Support for IP cameras and network devices• Easy installation - doesn't require any configuration of IP nor MAC address• Power supply PoE - pins 1, 2 and 3, 6• Supports long range power supply transmission via coaxial cable• The device operates from the PoE switch side• Possibility to mount on a wall, or on the DIN TS-35 rail
Power supply:	48 V ... 57 V DC
Weight:	0.07 kg
Dimensions:	79 x 64 x 23 mm
Manufacturer / Brand:	DAHUA
Guarantee:	3 years

PRESENTATION

Device connectors:

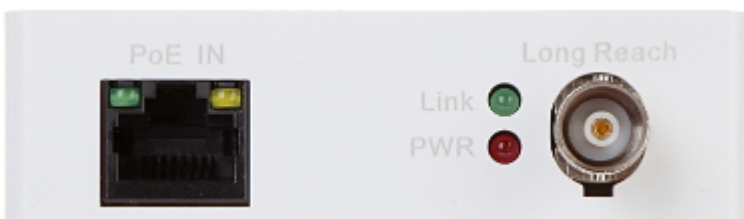

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Rear view:



Side view:





Transmission schematic diagram:



1. Switch PoE
 2. Coaxial cable
 3. UTP cat. 5e
 4. Camera IP PoE
- In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------