

Code: APD-200

## WIRELESS PIR DETECTOR **APD-200** ABAX/ABAX2 SATEL

Net: **47.89 EUR** Gross: **58.90 EUR**



Wireless motion detector, which is designed to detect the moving intruder within the system protected area. It is perfect to create surveillance system in small-size buildings, such as e.g.: kiosks, summer houses, boutiques, freestanding garages and workshops, and wherever conducting wire installation is difficult or impossible to perform.

The APD-200 supports the other devices compatible with wireless ABAX/ABAX2 system. Lithium battery to power the device ensures many years of work without having to replace it, so the system is as easy to get along in life as traditional wired solutions.

### SPECIFICATION

Support:	ABAX/ABAX2
Frequency range:	868 MHz ... 868.6 MHz
Radio communication range (at open area):	<ul style="list-style-type: none"><li>• ≤ 2000 m - ABAX2 @ ACU-220,</li><li>• ≤ 1600 m - ABAX2 @ ACU-280,</li><li>• ≤ 500 m - ABAX</li></ul>
Detection angle / Detection range:	90 ° / 15 x 24 m
Pet immunity:	—
Power supply:	CR123A 3 V
Battery lifetime:	~ 2 years
Recommended installation height:	2.4 m
Main features:	<ul style="list-style-type: none"><li>• Option to enable / disable approach zone control</li><li>• high quality Infra-Red path</li><li>• battery diagnostics</li><li>• Universal bracket, which allows to easy wall or ceiling mounting</li><li>• The LED to indicate violations in test mode, easy start-up and later maintenance of the system</li><li>• Tamper detection - opening the enclosure, removing from mounting surface</li><li>• Remote configuration</li></ul>
Protection class (Grade):	2
Complies with norms:	EN 50131-1, EN50130-4, EN50130-5
Operation temp:	-10 °C ... 55 °C
Weight:	0.12 kg

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

Dimensions:	62 x 137 x 42 mm
Manufacturer / Brand:	SATEL
Guarantee:	2 years

## PRESENTATION



Internal view:




Control keys:



Rear view:



Detector range:

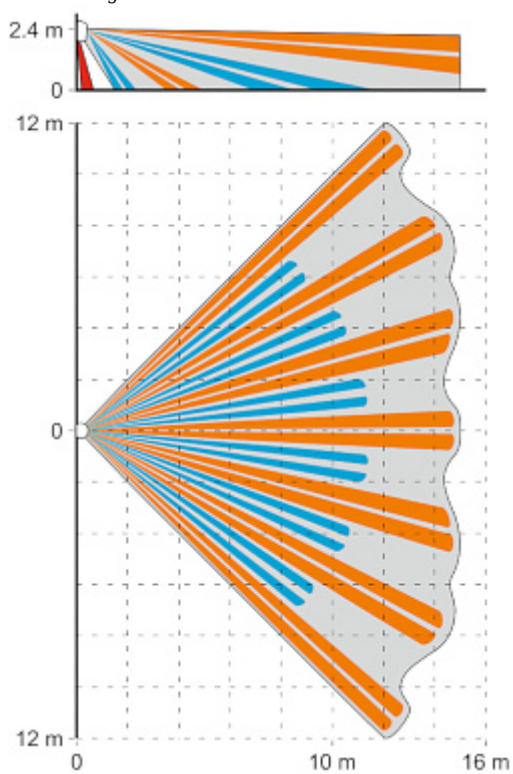

In the kit:

