

Code: VERSA-LCDM-WRL

WIRELESS KEYPAD **VERSA-LCDM-WRL** SATEL

Net: **98.84 EUR** Gross: **98.84 EUR**

The VERSA-LCDM-WRL keypad is intended for daily operations and programming the VERSA series alarm control system. With the LCD display showing text messages, even advanced functionalities of the alarm control unit are simple and convenient. The VERSA-LCDM-WRL supports the other devices compatible with wireless ABAX system.



SPECIFICATION

Support:	VERSA - ABAX
Frequency band:	868 ... 868.6 MHz - Encrypted transmission
Radio communication range (at open area):	500 m
Main features:	• Unique EM 125kHz proximity reader built-in • Bidirectional communication • Large, easily readable LCD with backlight displaying detailed information on system state • Keypad backlight buttons • LEDs indicating device operation state • Buzzer for acoustic signaling of some system events • Microswitch as tamper contact • Easy operation
Battery power supply:	2 x battery CR123A 3 V
Battery lifetime:	max. 3 years
Operation temp:	-10 °C ... 55 °C
Weight:	0.275 kg
Dimensions:	139 x 124 x 22 mm
Manufacturer / Brand:	SATEL
Guarantee:	2 years


PRESENTATION

Front panel:

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



View after remove the cover:

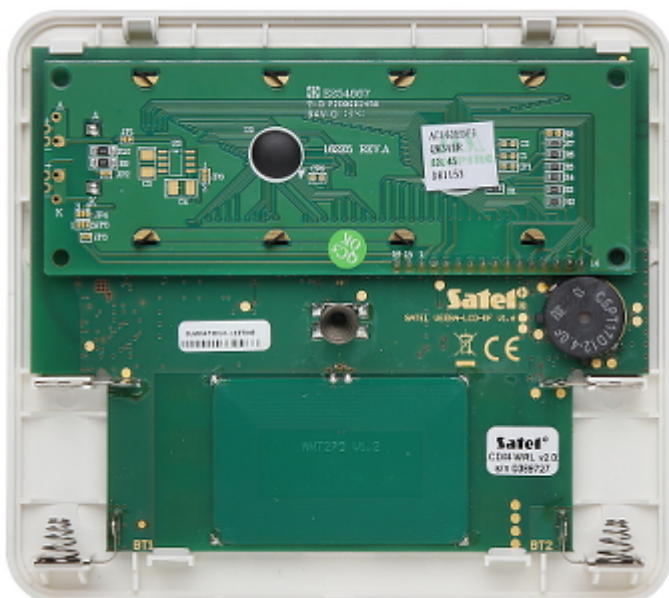

Mounting side view:



In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------