

Code: ARA-104S

## ANTENNA AMPLIFIER **ARA-104S** 8/12 dB AMS

Net: **14.78 EUR** Gross: **18.18 EUR**

The ARA-104S is used to TV signal distribution in home antennas installations. Two-stage, low noise, distribution amplifier, allows to connect 4 TV sets to the antenna installation or cable network.

Amplifier can be powered directly from included power adapter or via output with using a separator.



### SPECIFICATION


Frequency range:	87 MHz ... 774 MHz
Number of inputs/outputs:	1 / 4
Input/output impedance:	75 $\Omega$
Connectors type:	"F"
Gain :	8/12 dB
Gain adjustment:	0 ... 8 dB
S/N ratio:	$\leq 4$ dB
Maximum output level:	98 dB $\mu$ V
IMA3 60dB:	92 dB $\mu$ V
IMA2 60dB:	79 dB $\mu$ V
Return loss:	$\geq 10$ dB
Pre-amplifiers powering:	—
Main features:	<ul style="list-style-type: none"><li>• Built-in LTE filter</li><li>• Filters : &lt; 87 MHz, &gt; 862 MHz</li></ul>
Power supply:	12 V DC / 65 mA
Operation temp:	-25 °C ... 55 °C
Weight:	0.1 kg
Dimensions:	112 x 64 x 29 mm
Manufacturer / Brand:	AMS
Guarantee:	2 years

### PRESENTATION

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60



Top view:

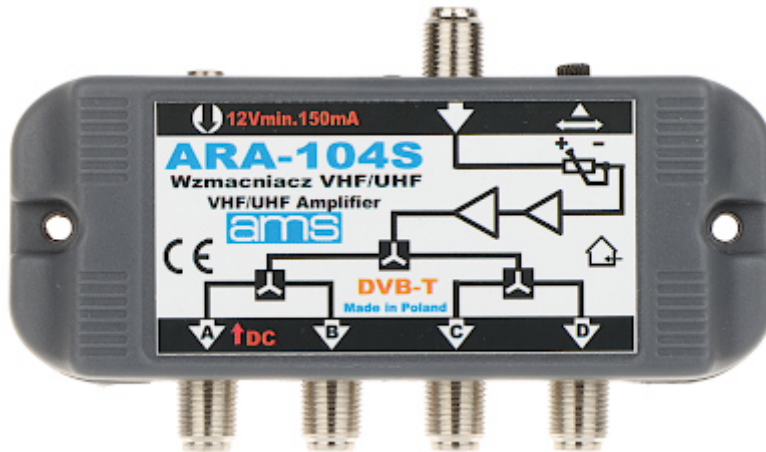

Connectors:



In the kit:

