

Code: PFM810

VIDEO AND POWER TRANSMITTERS VIA COAXIAL CABLE **PFM810** DAHUA

Net: **39.64 EUR** Gross: **48.76 EUR**

The PFM810 set allows to send power supply and video signal from CCTV camera via single coaxial cable for maximal distance of 400m. The device is designed to work with 75Ω impedance coaxial cables.

So, the coaxial cable passing the voltage to the camera and video signal from camera to the recorder. The maximum distance is determined by the quality of coaxial cable used.

Attention! The device operates as a dedicated set. The transmission line between the transformer A and transformer B can not contain any additional devices (video splitters, amplifiers, etc.). You should use only the coaxial cables with copper core. For indoor use only. Protect from moisture and dust.



SPECIFICATION


Standard:	AHD / HD-CVI / HD-TVI / PAL
Device type:	Active
Number of channels:	1 Video + 1 DC
Video transmission range:	max. 400 m @ 720p / 1080p
Input voltage:	24 ... 36 V DC - (power adapter not included)
Output voltage:	12 V DC
Coaxial socket type:	<ul style="list-style-type: none">• Transmitter BNC - Straight socket Video BNC - Plug with cable Video 2.1 / 5.5 mm - Socket DC• Receiver BNC - Straight socket Video BNC - Plug with cable Video 2.1 / 5.5 mm - Plug DC
Weight:	0.062 kg - Transmitter / Receiver
Dimensions:	88 x 29 x 22 mm - Transmitter / Receiver
Power supply distance:	<ul style="list-style-type: none">• 24 V DC / Coaxial cable - RG59 - 0 ... 100 m @ 5 W - 100 ... 250 m @ 3 W• 36 V DC / Coaxial cable - RG59 - 0 ... 150 m @ 9 W - 150 ... 300 m @ 6 W• 24 V DC / Coaxial cable - RG6 - 0 ... 100 m @ 6 W - 100 ... 300 m @ 3.5 W - 300 ... 400 m @ 3 W• 36 V DC / Coaxial cable - RG6 - max. 400 m @ 7 W
Manufacturer / Brand:	DAHUA
Guarantee:	2 years

PRESENTATION

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Transmission schematic diagram:

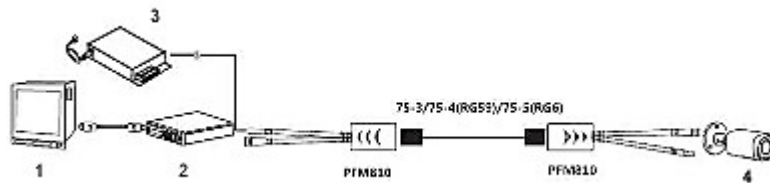

- 1. Monitor
- 2. Recorder
- 3. DC 24V ... 36V power adapter
- 4. Camera

Dimensions:

