

Code: APS-30

# BUFFERED SWITCHING POWER SUPPLY ADAPTER **APS-30** SATEL

Net: **100.03 EUR** Gross: **100.03 EUR**

The buffered power supply adapter is designed for powering control panels, sensors, code locks, cameras, consoles, intercoms and other alarm system equipment.  
Please pay attention for proper cooling conditions of the power adaptor during work!



## SPECIFICATION


Adapter type:	Switching
Input voltage:	230 V AC
Output voltage:	12 V
Max. output current (total):	3 A
Battery charging current:	0.5 A / 1 A (switchable)
Power:	36 W
Number of outputs:	3 pcs
Protections:	<ul style="list-style-type: none"><li>• Overvoltage</li><li>• Overload</li></ul>
Adapter operation control:	<ul style="list-style-type: none"><li>• AC input voltage presence indication AC</li><li>• Battery charging indication</li></ul>
Main features:	<ul style="list-style-type: none"><li>• Microprocessor based battery charge control system</li><li>• Tamper signaling</li><li>• LED indication</li><li>• 2 x OC output</li></ul>
Place for battery:	12V/17Ah
Max. battery dimensions:	190 x 165 x 80 mm
Operation temp:	5 °C ... 40 °C
Weight:	3.3 kg
Dimensions:	382 x 324 x 108 mm Buffered power unit

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

Manufacturer / Brand:	SATEL
Guarantee:	2 years

## PRESENTATION


Buffered power unit:

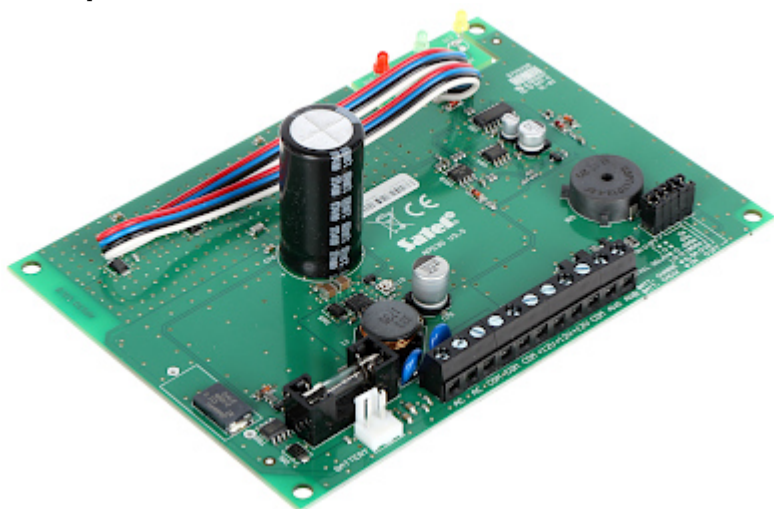

Connectors:



Top view:

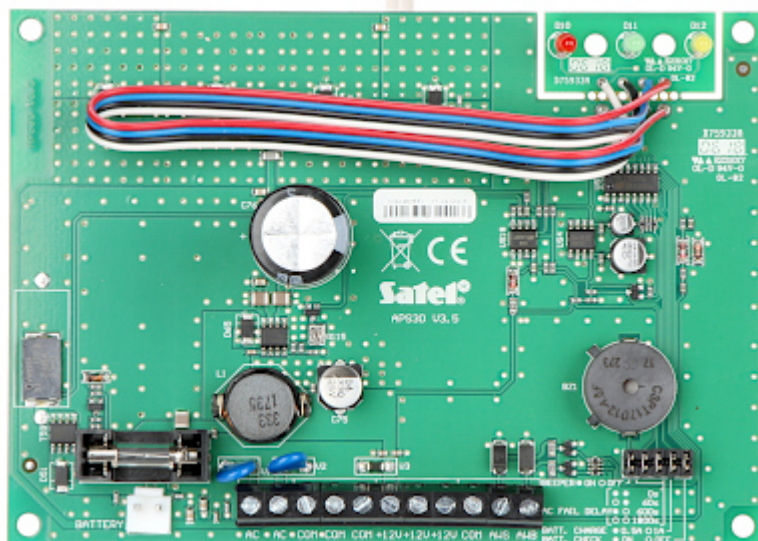

AC 18V power adapter:



Connectors:





Mounting side view:



Housing:



Internal view of the housing:

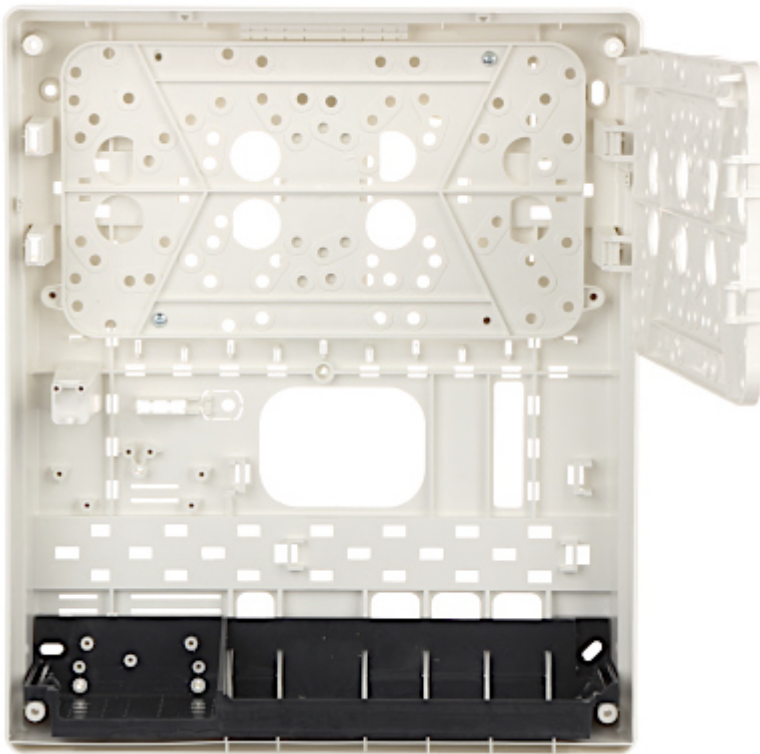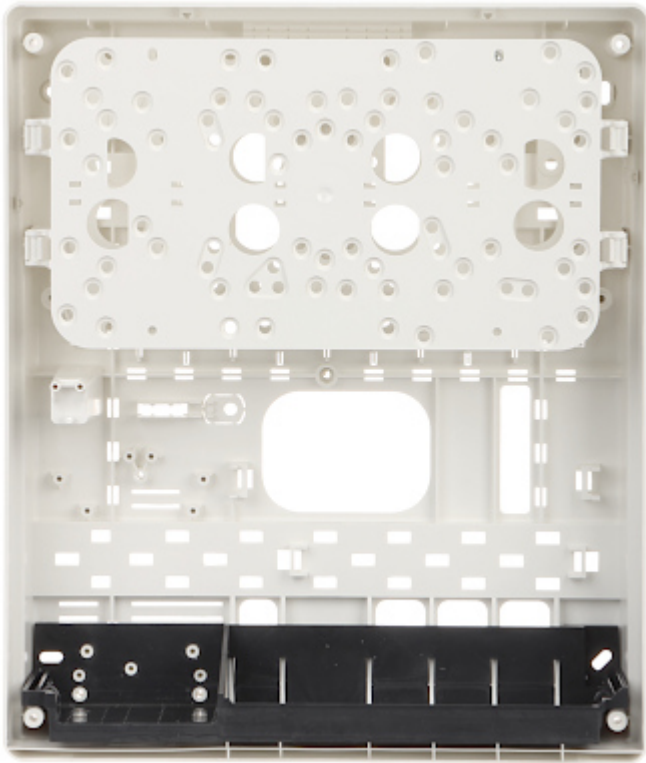


Mounting side view:







In the kit:

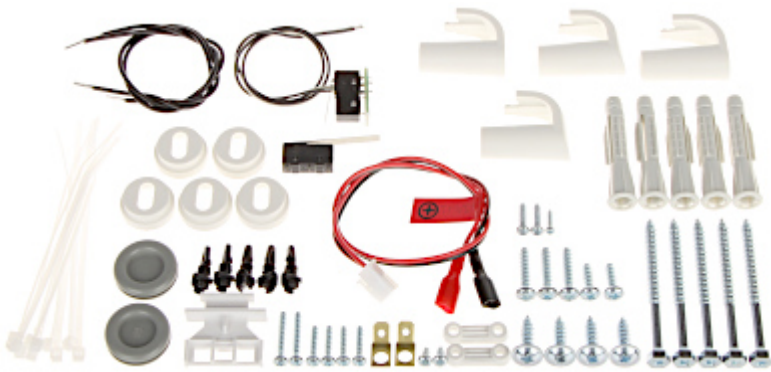

## PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60