


Code: LE-419237

CIRCUIT BREAKER **LE-419237** THREE-PHASE 25 A C TYPE LEGRAND

Thermal-magnetic circuit breaker with C-type curve and 25A rated current. The LE-419237 circuit breaker is compatible to DIN TS-35 rail mounting system.

Circuit breakers with C-type breaking curve are designed to protection against short-circuits and overloads of the installation, where are used the devices with high inrush currents (motors, transformers).

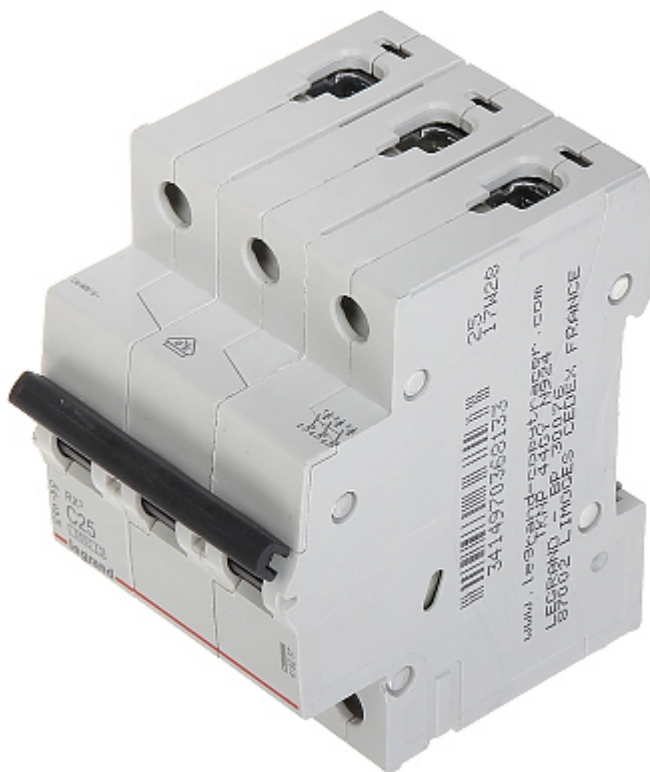

| | |
|---------------------------|---|
| Device type: | Circuit Breaker, Three-phase |
| Rated current: | 25 A |
| Number of poles: | 3 |
| Tripping curves: | C type |
| Breaking capacity: | 6000 A |
| Rated voltage: | <ul style="list-style-type: none">• 230 V AC / 50 Hz• 400 V AC / 50 Hz |
| Connectors type: | screw terminals |
| Housing: | Plastic, DIN, TS-35 rail mounting |
| Width in 17.5 mm modules: | 3 |
| Weight: | 0.4 kg |
| Dimensions: | 54 x 83 x 75 mm |
| Manufacturer / Brand: | LEGRAND |
| Guarantee: | 2 years |