


Code: SDQ-908

TV/SAT SPLITTER **SDQ-908** TERRA

The SDQ-908 splitter is used to divide 9-wired multiswitch bus into 4 paths. The splitter is equipped with 2 DC-transition switches that in "ON" position pass DC voltage through "H" paths to selected branches.

Die-cast housing guarantees high screening efficiency - class A.

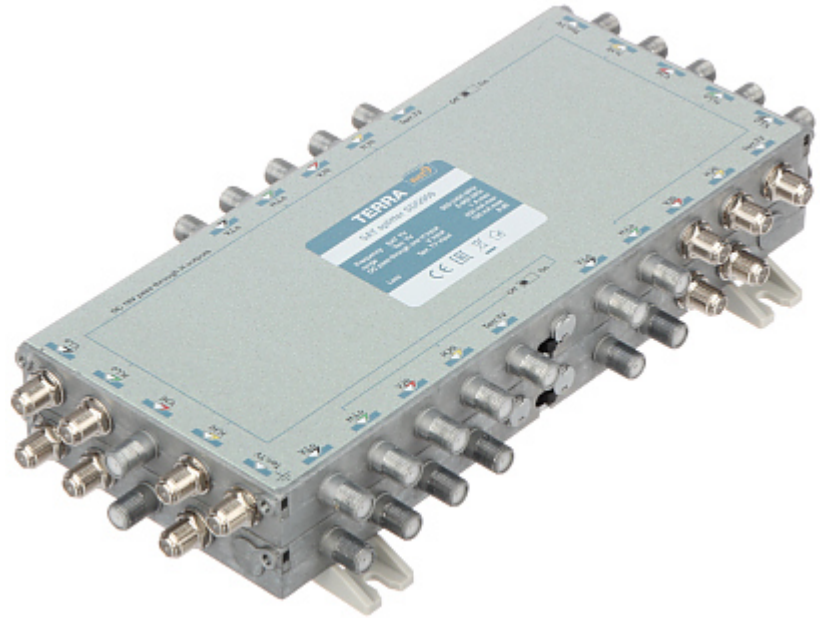

| | |
|----------------------------|--|
| Number of inputs: | 9 pcs |
| Number of outputs: | 36 pcs |
| Frequency range: | <ul style="list-style-type: none"> • 950 ... 2400 MHz - SAT, • 5 ... 862 MHz - RTV |
| Connection loss: | <ul style="list-style-type: none"> • 8 dB - SAT • 8 dB - RTV |
| Isolation between outputs: | 30 dB |
| DC-transition: | max. 2 A |
| Main features: | <ul style="list-style-type: none"> • 8 path SAT + RTV terrestrial splitter • The die-cast metal body provides effective shielding and high mechanical resistance |
| Operation temp: | -20 °C ... 50 °C |
| Weight: | 1.5 kg |
| Dimensions: | 267 x 135 x 51 mm |
| Manufacturer / Brand: | TERRA |
| Guarantee: | 2 years |