


Code: ZK-35

## SWITCHING ADAPTER **ZK-35**

Power adapter is equipped with aesthetic, solidly made metal casing box. Adapter operation is indicated by LED placed on the casing box. It is equipped with four terminals allowing to easy connect the devices. Each output is protected by a fuse, which can be adapted to the needs - remember the max. output current of the adapter is 2.52 A.

Attention! If the power adaptor is using for continuous work (24H) the rated current of the adaptor should be less than 80% of the maximal current. Please pay attention for proper cooling conditions of the power adaptor during work!

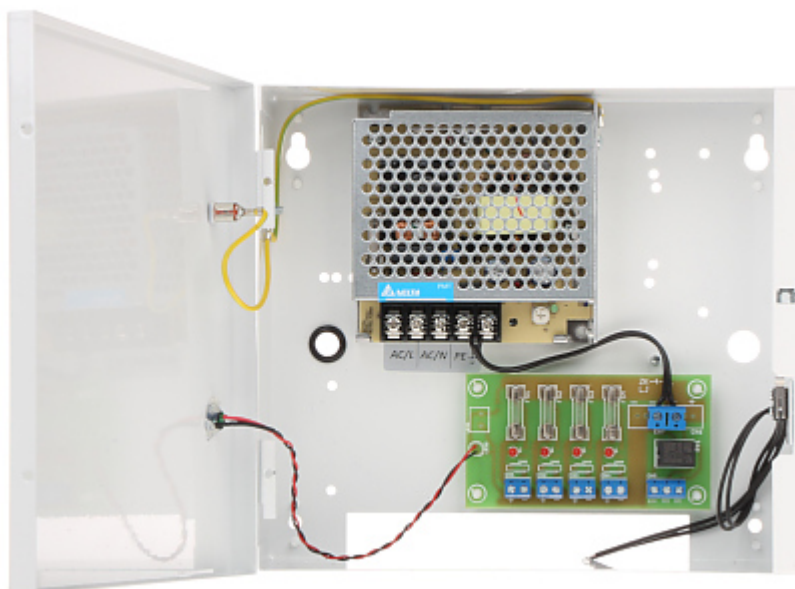

Adapter type:	Switching
Output voltage:	12 V DC
Output voltage adjustment:	11.4 V ... 13.3 V
Max. output current (total):	2.52 A (4 x 630mA)
Max. output current for single output:	0.63 A
LED indication:	✓
Input voltage:	230 V AC
Power:	31 W
Number of outputs:	4
Connector type:	4 two-terminal elements
Main features:	<ul style="list-style-type: none"> <li>• NO/NC relay built-in - possibility to send information about power loss at the output</li> <li>• Tamper protections</li> </ul>
Housing type:	Metal, wall-mounted
Weight:	1.01 kg
Dimensions:	218 x 195 x 70 mm
Guarantee:	2 years