


Code: A-U18A

ANTENNA AMPLIFIER **A-U18A**

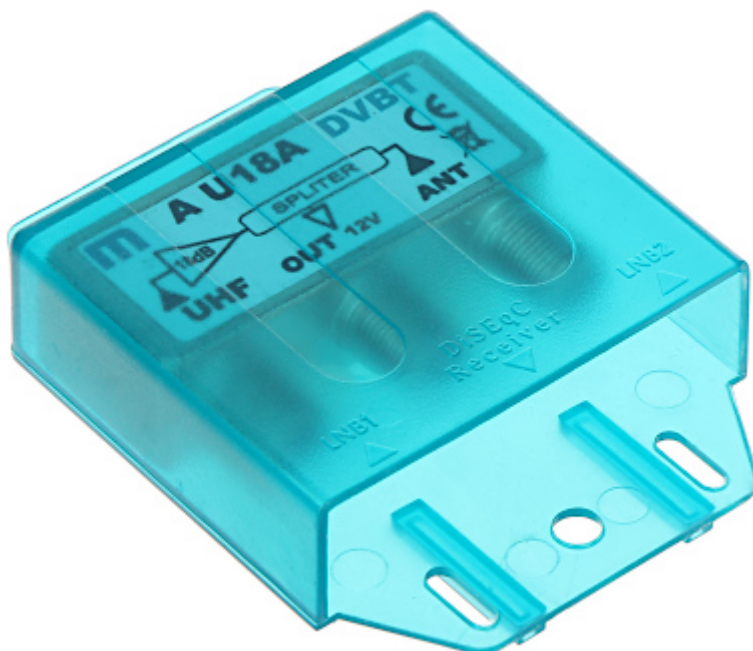

Channels:	21 ... 69
Frequency range:	470 ... 870 MHz
Gain :	18 dB
Gain adjustment:	—
Number of inputs/outputs:	2/1 (one antenna input without amplify)
IMA3 60dB:	100 dB μ V
Amplifier shield:	✓
Input/output impedance:	75 Ω
Connectors type:	"F"
Housing:	Plastic
Mounting:	on a mast or a wall
Power supply:	12 V / 80 mA via antenna cable
Manufacturer / Brand:	MEZON
Guarantee:	2 years