


Code: 12V/24A/PA18

## SWITCHING ADAPTER **12V/24A/PA18**

Power adapter is equipped with aesthetic, solidly made metal casing box. Adapter operation is indicated by LED placed on the casing box. Each power line is protected by a polymer fuse and has a LED indicator informing about output voltage presence. The adapter has the power off jumpers for each output.

Attention! If the power adaptor is using for continuous work (24H) the rated current of the adaptor should be less than 80% of the maximal current. Please pay attention for proper cooling conditions of the power adaptor during work!

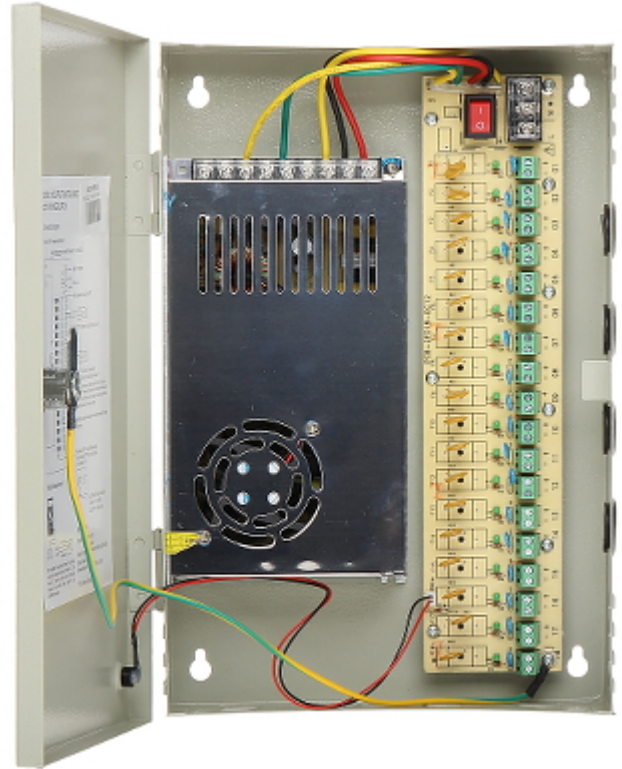

Adapter type:	Switching
Output voltage:	12 V DC
Output voltage adjustment:	11 ... 13 V
LED indication:	✓
Max. output current (total):	24 A
Max. output current for single output:	1.1 A
Input voltage:	230 V AC
Power:	288 W
Number of outputs:	18
Connector type:	Cable terminals
Housing type:	Metal, wall-mounted
Key closed:	✓
Weight:	1.882 kg
Dimensions:	315 x 215 x 65 mm



# DATA SHEET

---

Guarantee:	2 years
------------	---------