


Code: MTX-300

## WIRELESS SYSTEM CONTROL **MTX-300** SATEL

The MTX-300 controller enables expansion of the alarm systems by adding wireless devices that operate at 433 MHz frequency. The device can work in conjunction with SATEL control panels, including: INTEGRA, INTEGRA Plus, VERSA, VERSA Plus, as well as with MICRA module.

The module can also be used in any third-party alarm system or automation system, e.g. as a radio controller.

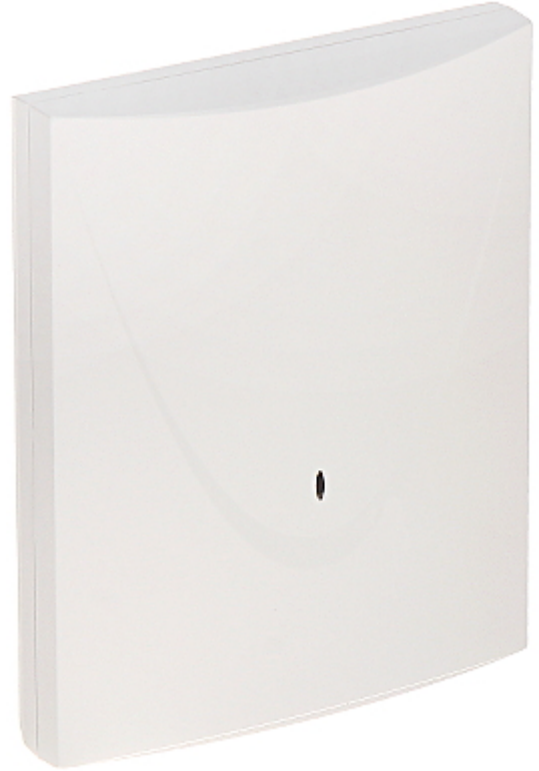

Support:	Satel MICRA
Number of supported wireless devices:	<ul style="list-style-type: none"> <li>• 32 x Remote control,</li> <li>• 16 x Wireless detector,</li> <li>• 4 x Signaling device</li> </ul>
Frequency band:	433.05 MHz ... 434.79 MHz
Inputs:	2 programmable inputs to sirens control
Outputs:	8 programmable relay outputs
Main features:	<ul style="list-style-type: none"> <li>• Autonomous operation or as terminal for the controller</li> <li>• Tamper detection - opening the enclosure</li> <li>• Programming using buttons located on mainboard or by the MTX SOFT application</li> </ul>
Power supply:	12 V DC / 70 mA (max)
Operation temp:	- 10 ... 55 °C
Dimensions:	126 x 158 x 32
Weight:	0.21 kg
Manufacturer / Brand:	SATEL
Guarantee:	2 years