

Warning!

Please read the user manual included in this work as it contains important information related with safety of installation and use of the device.

Only persons who read the user manual may use the device.

The user manual must be kept because it may be required in the future. The device is to be used exclusively for purposes specified in this user manual.

The device must be unpacked prior to starting-up. After removing the packaging make sure the device is in working order. If the product has defects, it should not be used until it is repaired.

The product is intended for use at home and commercial use and may not be used for other than intended use.

The manufacturer is not liable for damages resulting from not adhering to the rules contained in the user manual, therefore, we recommend to follow the aforementioned safety rules for operation and maintenance of the device. In this way you will ensure yourself safety and avoid causing damage to the device.

The manufacturer and the supplier are not liable for losses or damages arising out of the product, including financial or intangible losses, loss of profits, income, data, pleasure from use of the product or other products related with it - indirect, incidental or consequential loss or damage. The above provisions apply whether the loss or damage concerns:

1. Deterioration of quality or the lack of operation of the products or products related with it due to damage as well as the lack of access to the product when it is undergoing repair, which results in stoppage the loss of user's time or a break in business activity;
2. Improper results of operation of the product or products related with it;
3. It applies to losses and damages according to any legal category, including negligence and other losses, termination of a contract, expressed or implied guarantee and strict liability (even if the manufacturer or the supplier was notified about the possibility of occurrence of such damages).

Safety measures:

Particular attention at designing was directed to quality standards of the device where ensuring safety of operation is the most important factor.

The device must be secured against contact with caustic, staining and viscous fluids.

The device was designed in such a way that it restarts operation when power supply is restored after a break.

Attention! We recommend using protections to further protect the device from possible overvoltages in installations. Surge protectors are effective protection against accidental pass to the device voltages higher than the rated. Damages caused by pass the voltages higher than specified in manual, are not under warranty.

Turn off the device before transporting it.

Prior to connecting the device to a power source check whether the supplied voltage is consistent with rated voltage specified in the user manual.

Proper product disposal:

A marking of a crossed out waste bin indicates that the product may not be disposed together with other household waste in the entire EU. To avoid possible damage to the natural environment of health due to uncontrolled waste disposal, therefore, it should be handed over for recycling, propagating in this way sustainable use of natural resources.

To return a worn-out product, use a collection and disposal system of this type of equipment or contact a seller from whom it was purchased. He will then be recycled in an environmentally-friendly way.

The MNVR4104-GFW is a mobile recorder designed to use in coaches, city buses, busses, trams, subway, corporate and personal vehicles and special vehicles ie. lorries, police cars, prison or military cars, ambulances. It can also support to connect various accessories, such as card reader, fuel sensor, emergency button, etc.

The device has been specially designed so that exhibited increased resistance to oscillations and vibrations. The recorder supports 1 SD card with capacity up to 256 GB and SATA hard disk. The device was also designed to work with the CAN bus.

The power cables of the MNVR4104-GFW are connected to the car's battery and ignition (analogous to radio receiver), so when you turn the ignition device automatically begins recording the audio-video data. Additionally the device is equipped with a power backup and during 5 seconds after power loss is still recording.

Compliance with EN50155 / ISO16750 standard.

Attention! M12 / M16 connectors. The recorder supports the disk in the 2.5" size.





User Manual

Code: MNVR4104-GFW
IP MOBILE DVR **MNVR4104-GFW** 4 CHANNELS DAHUA

Video inputs:	4 pcs Ethernet + PoE (802.3af/at) - RJ-45 socket
Video outputs:	1 pcs CVBS, BNC 1 pcs CVBS, M12, 4-pin plug, Code A 1 pcs VGA - M16, 10-pin socket 1 pcs VGA (D-Sub 15-pin) - Through the extension port 1 pcs HDMI
Audio inputs:	<ul style="list-style-type: none">• 4 pcs - Audio from cameras• External microphone - 2-pin
Audio outputs:	1 pcs - 2-pin
Resolution of recording video files:	max. 4 Mpx
Bitrate:	100 Mbps
Network protocols:	TCP/IP, UDP, DHCP, DNS, IP Filter, PPPoE, DDNS, FTP, E-mail, Alarm Server
Supported hard drives:	1 pcs 2.5 " SATA
Max. capacity of memory card:	256 GB SD/SDHC
Image compression method:	H.265 / H.264
Number of compression levels:	8
GPS:	✓
Wi-Fi:	✓
3G/4G:	✓
SIM socket:	✓
G-Sensor:	✓
RS-485:	✓
RS-232:	✓
Alarm inputs / outputs:	9 / 2
Power supply:	6 V ... 36 V DC
Power consumption:	≤ 10.2 W (without HDD)
Main features:	<ul style="list-style-type: none">• Power supply PoE - IEEE 802.3af / IEEE 802.3at• Alarms and maintenance events registration• Alarms and errors memory reading• Zone state signaling• Auto recording after power on• Control panel CAN (Control Area Network)
Operation temp:	-30 °C ... 70 °C
Permissible relative humidity:	10 % ... 95 % RH
Weight:	1.95 kg
Dimensions:	190 x 209 x 60 mm
Manufacturer / Brand:	DAHUA
Guarantee:	3 years

Front view:




Rear view:





The device is equipped with SATA 2.5" HDD mobile rack:

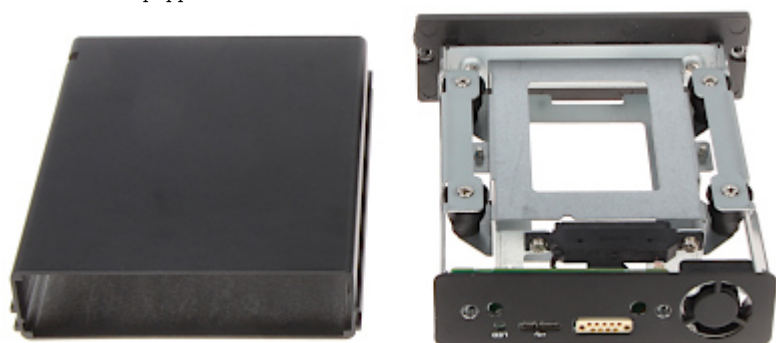

In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------