

Code: DS-KD8003-IME1(B)/EU

## VIDEO DOORPHONE MODULE **DS-KD8003-IME1(B)/EU** Hikvision

Net: **785.00 PLN** Gross: **785.00 PLN**



The DS-KD8003-IME1(B)/EU is the main unit of the video doorphone modular system of the Hikvision brand.

Using the DS-KD8003-IME1(B)/EU main unit, the video doorphone system can be extended to a maximum of 8 extension modules. Installation of DS-KD-xx series modules takes place in dedicated DS-KD-ACF series housings (flush-mounted housings) and DS-KD-ACW series housings (surface-mounted housings).

### SPECIFICATION

Compatibility:	Hikvision - DS-KD-xx
Doorbell button:	1 pcs
Sensor:	2.1 Mpx CMOS
Camera resolution:	1920 x 1080 - 1080p
Camera view angle:	146 °
Image compression method:	H.264
IR illuminator:	✓
Ethernet:	10/100 Mb/s
Network protocols:	TCP/IP, RTSP
Alarm inputs:	4 pcs
Relay outputs:	2 x NO/NC
Main features:	<ul style="list-style-type: none"><li>• Bidirectional communication,</li><li>• Microphone built-in,</li><li>• Speakers built-in,</li><li>• Noise suppression and echo cancellation,</li><li>• Tamper detection - removing from mounting surface,</li><li>• Installation of DS-KD-xx series modules takes place in dedicated DS-KD-ACF series housings (flush-mounted housings) and DS-KD-ACW series housings (surface-mounted housings)</li></ul>
Housing:	Metal
Color:	Black

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

"Index of Protection":	IP65
Power supply:	<ul style="list-style-type: none"> <li>• PoE (802.3af),</li> <li>• 12 V DC</li> </ul>
Power consumption:	≤ 5 W
Operation temp:	-40 °C ... 60 °C
Weight:	0.38 kg
Dimensions:	100 x 98 x 44 mm
Supported languages:	Polish, English, Bulgarian, Croatian, Czech, French, Greek, Spanish, Dutch, German, Portuguese, Russian, Romanian, Serbian, Slovak, Turkish, Ukrainian, Hungarian, Vietnamese, Italian
Manufacturer / Brand:	Hikvision
SAP Code:	305303873
Guarantee:	<b>3 years</b>

## PRESENTATION

Front panel:



Rear view:







Connectors view:



Dimensions:

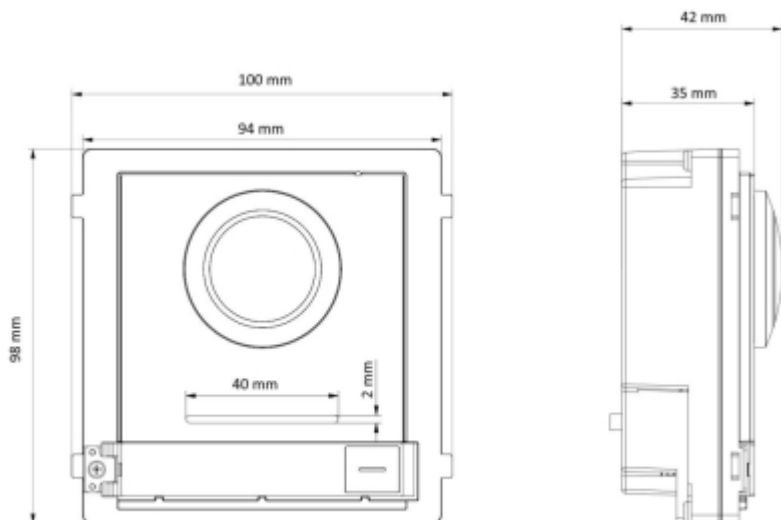


Example of application:

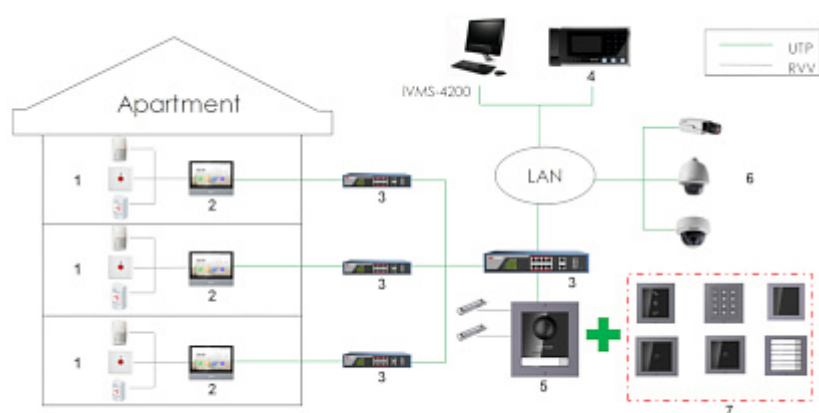

1. Alarm sensors
2. INDOOR PANEL
3. Switch PoE
4. Guard station
5. Main unit powered by PoE switch
6. IP cameras
7. Expansion modules

In the kit:

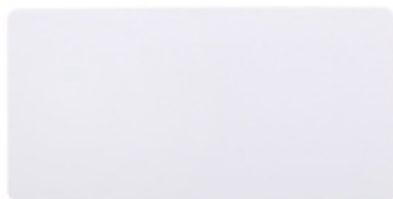

## PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------