

Code: 24V/3A/PA4AC

## AC POWER SUPPLY ADAPTER **24V/3A/PA4AC** TRANSFORMING

Net: **24.00 PLN** Gross: **24.00 PLN**

Power adapter is equipped with aesthetic, solidly made metal casing box. Power adapter output voltage is AC 24V. It allows to connect up to 4 devices. Maximal load for the one output is 1A, but you should remember the total load for all outputs must be lower than 3A. Each power line is protected by a polymer fuse and has a LED indicator informing about output voltage presence.

Attention! If the power adaptor is using for continuous work (24H) the rated current of the adaptor should be less than 80% of the maximal current. Please pay attention for proper cooling conditions of the power adaptor during work!



### SPECIFICATION

Adapter type:	Transforming
Output voltage:	~ 24 V AC
Output voltage adjustment:	—
Max. output current (total):	3 A
Max. output current for single output:	1 A
Outputs protection:	1 A Polymer
LED indication:	✓
Input voltage:	230 V
Power:	72 VA
Number of outputs:	4
Connector type:	Cable terminals
Housing type:	Metal, wall-mounted
Key closed:	✓
Weight:	1.64 kg
Dimensions:	216 x 185 x 73 mm
Guarantee:	2 years


### PRESENTATION

Metal box of the adapter with closed door (the AC 230V socket visible at the side):

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60



Internal view:

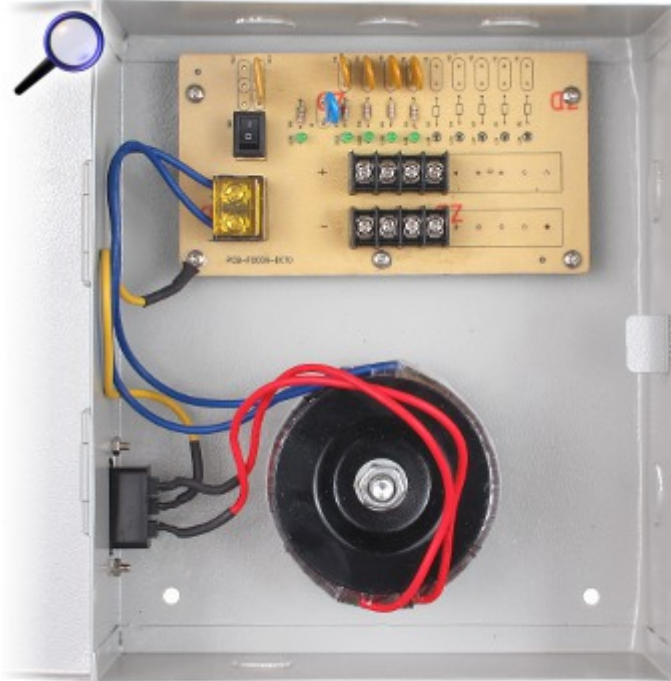

Rear view - power cables holes (rear and bottom):



In the kit:



## PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60