

Code: DH-IPC-HFW5221EP-Z

IP CAMERA **DH-IPC-HFW5221EP-Z** - 1080p 2.7 ... 12 mm - MOTOZOOM DAHUA

Net: **274.92 EUR** Gross: **274.92 EUR**

IP camera with efficient H.264 image compression algorithm for clear and smooth video streaming at maximal resolution of 1080p (2 MPx). Due to above it is perfect solution for surveillance systems requiring persons or vehicles recognition. The used motozoom lens with 2.7 ... 12 mm focal length allows to remote view angle adjustment.

Very easy operation by Internet Explorer browser allows the users to convenient and remote support, and also remote management of the camera. Included camera software enables management and integrated monitoring of many network cameras.



SPECIFICATION

Standard:	TCP/IP
Sensor:	1/2.7 " Progressive Scan CMOS
Matrix size:	2.1 Mpx
Resolution:	1920 x 1080 - 1080p 1280 x 1024 - 1.4 Mpx 1280 x 960 - 1.3 Mpx 1280 x 720 - 720p 704 x 576 - D1
Lens:	2.7 ... 12 mm - Motozoom
View angle:	• 99 ° ... 34 ° (manufacturer data) • 88 ° ... 34 ° (our tests result)
Compression:	H.264 / MJPEG
S/N ratio:	> 50 dB (AGC off)
Range of IR illumination:	50 m
Alarm inputs / outputs:	2 / 1
Bitrate:	16 ... 10240 kbps - H.264
Main stream frame rate:	25 fps - 1080p
Network interface:	10/100 Base-T (RJ-45)
Network protocols:	IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour
Audio:	• External microphone input • Audio output • Bi-directional audio streaming support • Audio detection
WEB Server:	Built-in, NVR compliance

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Memory card slot:	Micro SD memory cards up to 128GB support (possible local recording)
Max. number of on-line users:	20
ONVIF:	2.42
Mobile phones support:	Port no.: 37777 or access by a cloud (P2P) • Android: Free application DMSS , Android: Free application IMOU • iOS (iPhone): Free application DMSS , iOS (iPhone): Free application IMOU
Default IP address:	192.168.1.108
Default admin user / password:	admin / admin
Web browser access ports:	80, 37777
PC client access ports:	37777
Mobile client access ports:	37777
Port ONVIF:	80
RTSP URL:	rtsp://admin:hasło@192.168.1.108:554/cam/realmonitor?channel=1&subtype=0 - Main stream rtsp://admin:hasło@192.168.1.108:554/cam/realmonitor?channel=1&subtype=1 - Sub stream
RS-485 interface:	—
Main features:	• ICR - Movable InfraRed filter • DNR - Digital Noise Reduction • AGC - Automatic Gain Control • ABF - (Auto Back Focus) - auto focus correction during day/night operation modes switching • WB - White Balance (ATW/AWB/manual/indoor/outdoor) • WDR - Wide Dynamic Range • BLC - configurable Back Light Compensation • HLC - High Light Compensation (spot) • Day/Night mode (color/b&w/auto) • Audio detection • IVS analysis - intrusion, crossing the line (tripwire), scene changing, abandoned/missing object • Motion Detection • Configurable Privacy Zones • Mirror - Mirror image • Sharpness - sharper image outlines
Operation temp:	-30 °C ... 60 °C
Color:	White
"Index of Protection":	IP67
Power supply:	• PoE (802.3af), • 12 V DC / 940 mA
Housing:	Compact, Metal / Plastic
Supported languages:	English, Polish
Manufacturer / Brand:	DAHUA
Weight:	0.992 kg
Dimensions:	274 x 95 x 95 mm
Guarantee:	3 years

PRESENTATION



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Side view:




Bottom view:




Bottom view (after remove the cover):




Camera mounting side view:

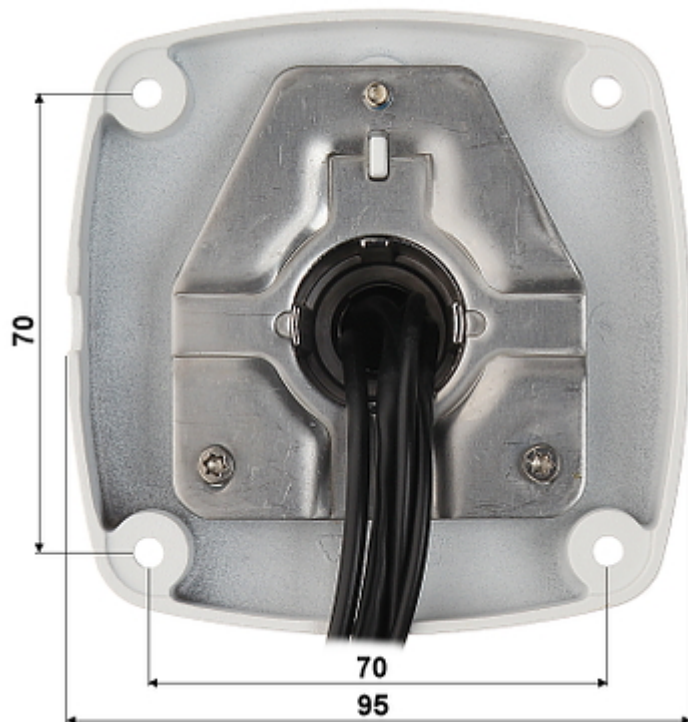

In the kit:

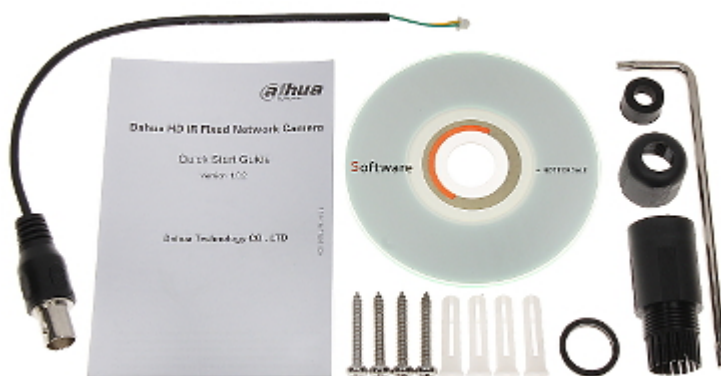

Example captures of device interface:

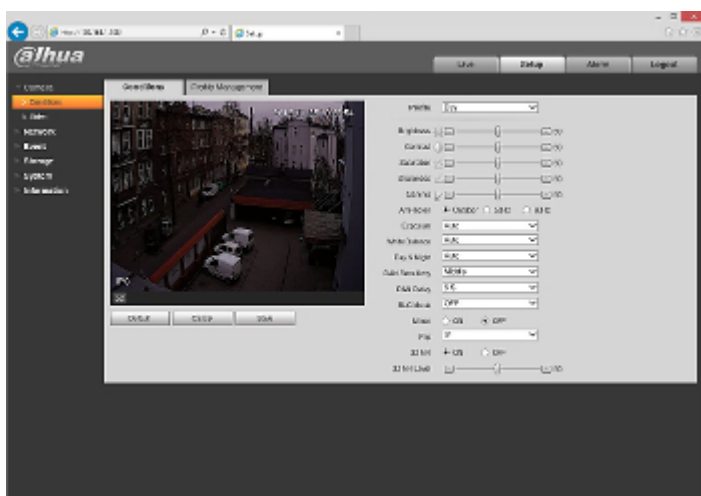

See the ability of operation in imou cloud:

:

OUR TESTS

Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:



OUR OPINIONS



- Motozoom lens.

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60