

Code: M-3F

MULTIFUNCTIONAL MODULE **M-3F** VIDOS

Net: **77.26 EUR** Gross: **77.26 EUR**

The M-3F module allows to extend the functionality of the VIDOS DUO video doorphone system.

The device increases the transmission range between the door station and internal panels up to 300m, allows to connect more internal panels (max 32 panels per module, max 8 modules - in total 256 users) and allows to connect a MASTER fencing station to the system.




SPECIFICATION

Support:	VIDOS DUO 2-wire Video Doorphones
Interface:	2-wire
Operation state indication:	LED indication
Assembly:	DIN, TS-35 rail mounting
Main features:	<ul style="list-style-type: none">• Repeater - Increasing the transmission range up to 300m• Router - Connecting more users : max. 32 / M-3F Module, max. 8 max. 8 modules - max. 256 users (total)• Gateway - Possibility to connect a MASTER gate station
Power supply:	24 V DC
Power consumption:	<ul style="list-style-type: none">• 0.32 W (Standby mode)• 3.7 W (operation)
Weight:	0.2 kg
Dimensions:	90 x 72 x 60 mm
Operation temp:	-10 ... 55 °C
Manufacturer / Brand:	VIDOS
Guarantee:	3 years

PRESENTATION




DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

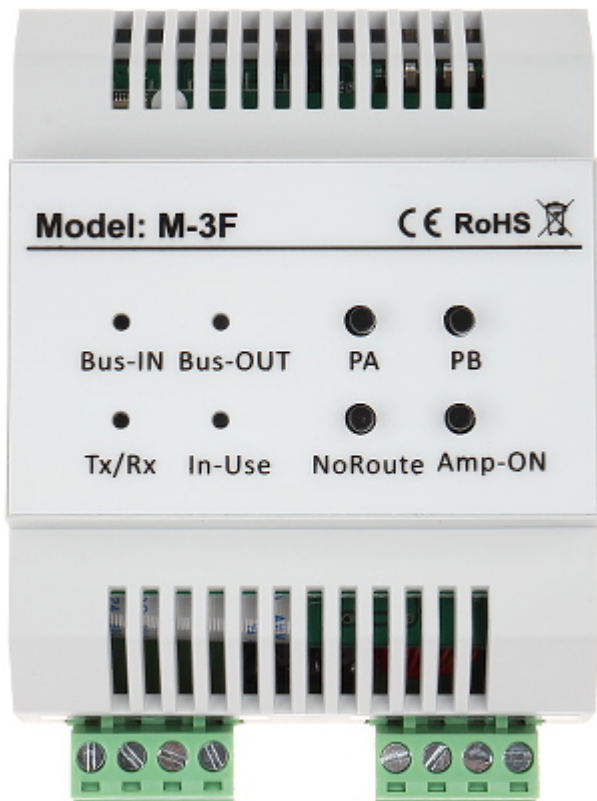

Top view:




Bottom view:

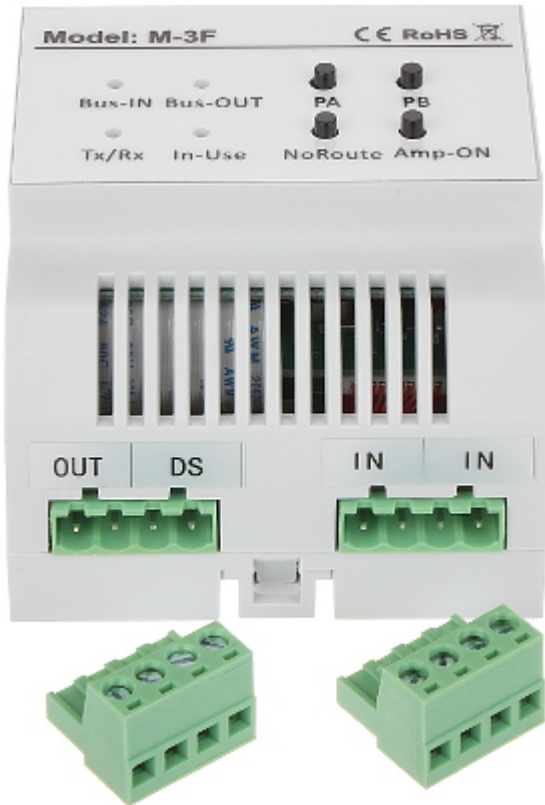

Mounting side view:



In the kit:

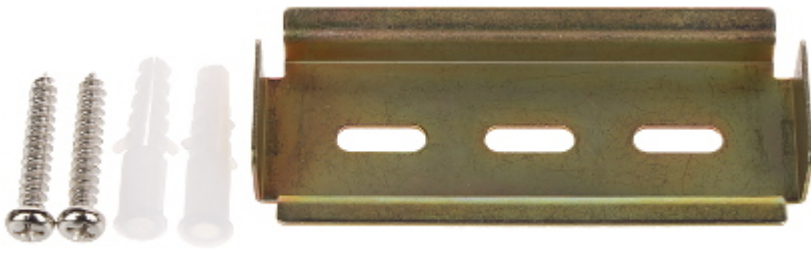

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

