

Code: AV-500AHD-MINI

WIRELESS TRANSMISSION KIT AHD-M 5.8 GHz **AV-500AHD-MINI** TXRX SET

Net: **181.53 EUR** Gross: **181.53 EUR**

The AV-500AHD-MINI kit is designed for transmission of high resolution image in AHD-M / AHD-L / PAL standard. A both devices have built-in the antennas, which enable good quality transmission up to 500m distance and can operate on the one of the 8 available frequency channels.

To correct operation, the transmitter and the receiver should be visible to each other and have set the same channel configuration (the same channel switchers settings).

The device has a differential (symmetrical) input / output, which allows to signal transmission via twisted-pair cable and also an asymmetrical input / output to signal transmission via coaxial cable.




SPECIFICATION

Number of video channels transmitted simultaneously:	1
Number of channels:	8
Frequency range:	5.610 ... 5.855 GHz The channels list Ch 1 = 5.855 GHz Ch 2 = 5.820 GHz Ch 3 = 5.780 GHz Ch 4 = 5.745 GHz Ch 5 = 5.715 GHz Ch 6 = 5.680 GHz Ch 7 = 5.645 GHz Ch 8 = 5.610 GHz
Video format:	• AHD-M, • AHD-L, • PAL
Number of audio channels:	1 x 2 Vpp
Audio frequency response:	50 Hz ... 15 kHz
Transmitter power:	20 dBm
Receiver sensitivity:	-80 dBm
Radio communication range (at open area):	500 m
S/N ratio:	40 dB
Modulation:	FM
Connectors:	75 Ω / 100 Ω - Video line (asymmetric or symmetric signal)
Power supply:	• 9 V ... 24 V AC/DC, 240 mA - Transmitter • 9 V ... 24 V AC/DC, 130 mA - Receiver
Protection:	Overvoltage : 600 W - Video, Audio, 600 V - Power supply

Main features:	• Real time transmission, with no delays nor loss of image quality • interference free transmission (industrial, 802.11, Bluetooth, radiotelephony, etc.) • High gain directional antennas providing stable operation
"Index of Protection":	IP65
Operation temp:	-20 °C ... 40 °C
Weight:	• 0.270 kg - Transmitter • 0.280 kg - Receiver
Dimensions:	78 x 118 x 79 mm - Transmitter or receiver dimensions
Guarantee:	2 years

PRESENTATION

Transmitter and receiver (after remove the cover):

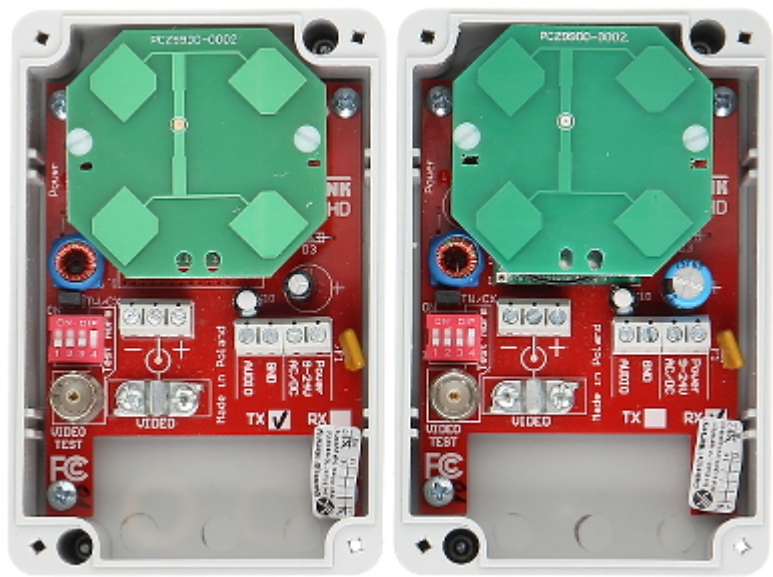


Mounting side view:



Bottom view:



Transmission schematic diagram:

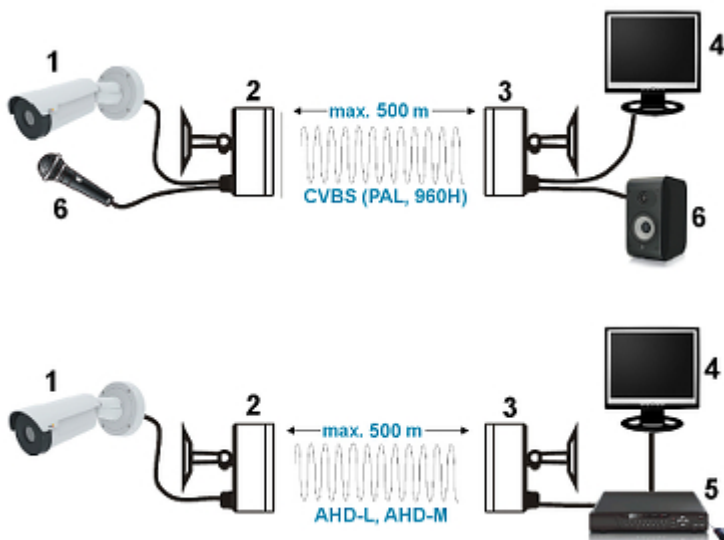

- 1) Camera AHD / PAL
- 2) Transmitter
- 3) Receiver
- 4) Monitor
- 5) AHD DVR
- 6) Audio

In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60