

Code: JA-120Z

BUS BACK-UP BOOSTER AND SPLITTER UNIT **JA-120Z** JABLOTRON

Price visible after login

Device is designed for current boosting of the bus, extension of the line length and galvanic isolation of the bus. The product is a component of the JABLOTRON 100 system. The device is addressable, and occupies one address in alarm system.




SPECIFICATION

Support:	JABLOTRON 100
Number of inputs:	1 x Control panel BUS
Number of outputs:	2 x Control panel BUS
Maximal outputs load:	2 A
Increasing the range of the bus:	500 m (for each output)
Power supply:	12 V DC / 2 A - JA-83PWR power adapter (included)
Battery backup support:	12 V / 7 ... 18 Ah (not included)
Main features:	<ul style="list-style-type: none">• Up to 3 boosters can be arranged in series• The galvanic isolation of the output terminals deals with different ground potentials and safety isolation of the bus
Weight:	<ul style="list-style-type: none">• 0.044 kg - PCB• 0.364 kg - JA-83PWR power adapter
Dimensions:	<ul style="list-style-type: none">• 102 x 66 x 14 mm - PCB• 170 x 80 x 65 mm - JA-83PWR power adapter
Manufacturer / Brand:	JABLOTRON
Guarantee:	2 years

PRESENTATION

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

JA-120Z:

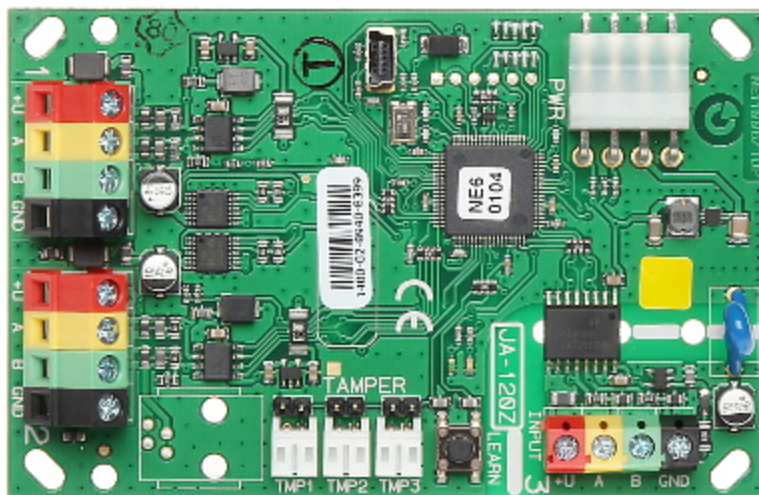


JA-83PWR power adapter:

Top view:




Device connectors:

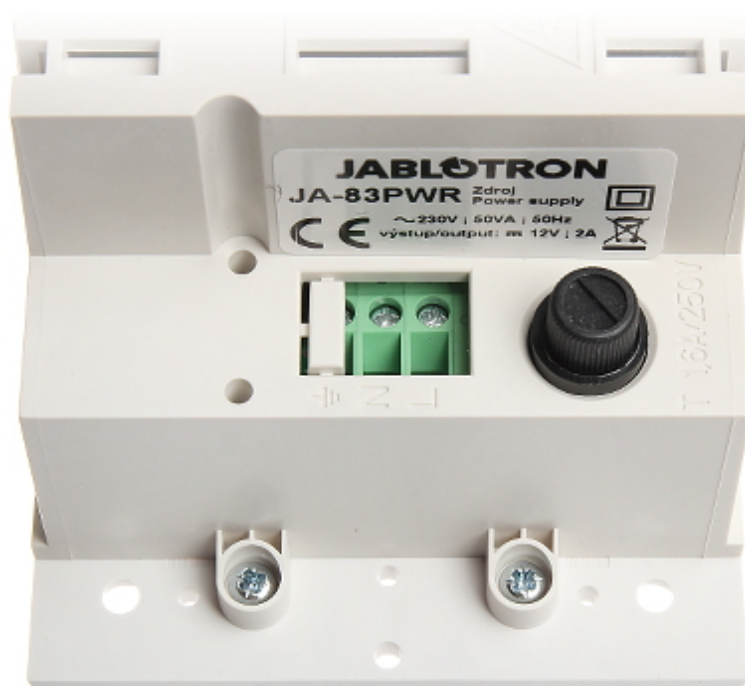



Bottom view:

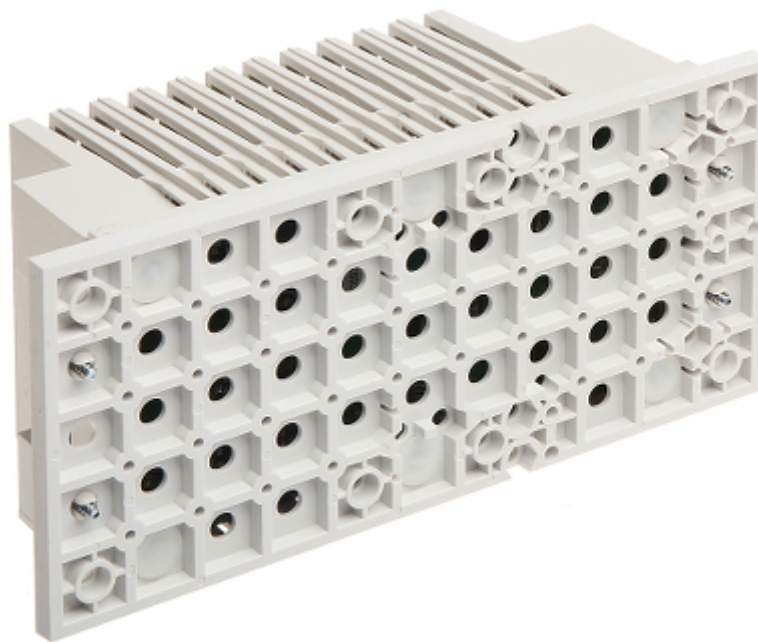

In the kit:

