

Code: JA-150M

WIRELESS MAGNETIC CONTACT **JA-150M** JABLOTRON

Price visible after login

The JA-150M wireless detector (magnetic contact) is used to protection the windows and doors. Additionally the device is equipped with IN1, IN2, TMP inputs, which enable connecting any wire detector. The detector is also designed to detect the mishandling of security roller blinds. The device communicates with alarm control panel wirelessly via JABLOTRON protocol.
Attention! Battery not included.



SPECIFICATION

Support:	JABLOTRON 100
Detection:	• Opening the door or window, • The IN1, IN2, TMP inputs, which enable connecting any wire detector
Alarm signaling:	Signal to control panel
Frequency range:	868.1 MHz JABLOTRON protocol
Radio communication range (at open area):	max. 300 m
Alarm inputs:	IN2, TMP = NC IN1 = NC or parameterized 1k
Battery:	1 x 1.5 V LR6 (AA) (not included)
Backup time:	~ 2 years
Environment class:	Grade 2
Operation temp:	-10 °C ... 40 °C
Weight:	0.04 kg
Dimensions:	• 25 x 110 x 23 mm - Transmitter • 16 x 55 x 16 mm - Magnet A • Ø 9.5 x 3.1 mm - Magnet B
Manufacturer / Brand:	JABLOTRON
Guarantee:	2 years


PRESENTATION

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Internal view of the housing:



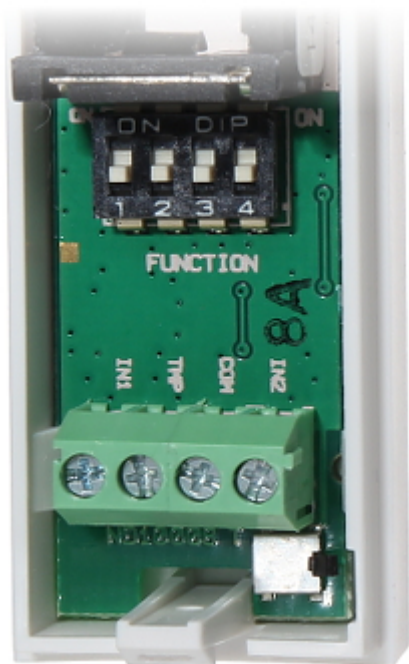


Mounting side view:



Magnet A:



In the kit:

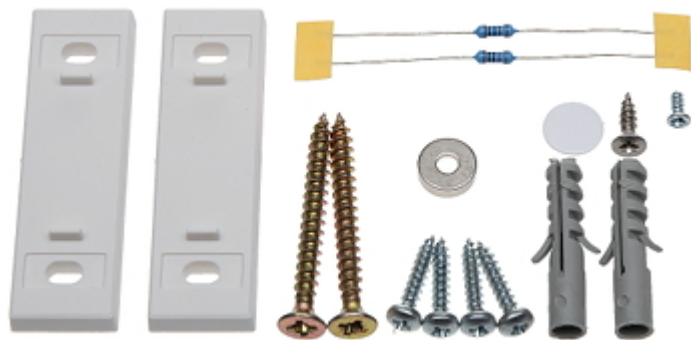

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60