

Code: IPB-5-10A-S4

SWITCH POE **IPB-5-10A-S4** 5-PORT ATTE

Net: **78.66 EUR** Gross: **78.66 EUR**

The IPB-5-10A-S4 switch was designed as a complete, integrated solution for powering small CCTV IP systems (e.g. 5 IP cameras).

PoE powering possibility, compatible with the 802.3af/at standard makes the device more universal and easier to install. 5 ports support Power over Ethernet (PoE) function.



SPECIFICATION

LAN ports:	• 1 x RJ45 10/100 Base-T - Uplink • 5 x RJ45 10/100 Base-T - PoE (802.3af/at) / Passive PoE
Management:	—
LED diodes:	Power, LAN
Transmission speed:	10 / 100 Mbps : 1 Port LAN + 5 LAN & PoE ports
Maximal output power:	• 40 W @ Passive PoE - 1 ... 5 ports, • 30 W @ PoE (802.3at) - 1 ... 5 ports • 15.4 W @ PoE (802.3af) - 1 ... 5 ports
Maximal total power:	90 W
Main features:	• Supported PoE devices: 802.3af/at, Passive PoE • Possibility to connecting in cascade • Efficiency : 93 % @ 90 W • 5 polymer fuses - PoE • Possibility to power other devices powered from 55 V (screw connection) • PSU thermal protection • Short-circuit protection • Overload protection • The ability to independently turn on and off the PoE power for each of the LAN 1 ... LAN 4 ports • Switch has built-in a 55 V DC power supply adapter with power of 90 W • "Index of Protection" : IP55
Power supply:	180 ... 240 V AC - Built-in switching power supply
Weight:	0.43 kg
Dimensions:	158 x 118 x 77 mm
Manufacturer / Brand:	ATTE
Guarantee:	3 years

PRESENTATION

Internal view of the housing:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60




Housing:





In the kit:

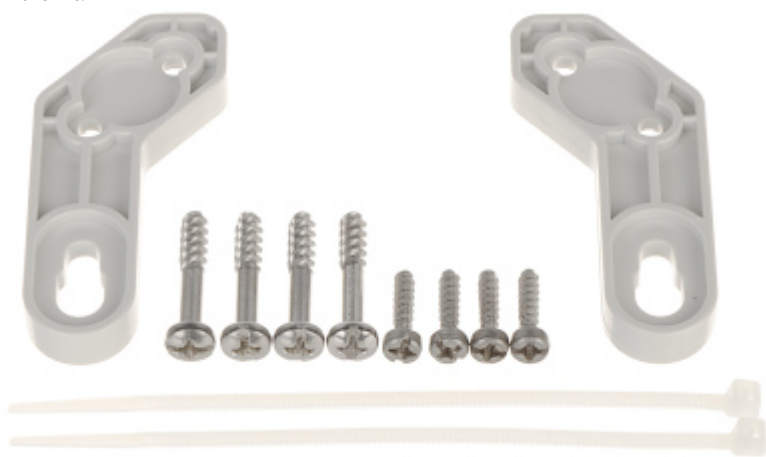

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60