

Code: GTX-B1-24-242SFP

SWITCH POE **GTX-B1-24-242SFP** 24-PORT SFP

Net: 1 374.40 PLN Gross: 1 374.40 PLN

Due to the reliability and ensuring high quality of transmission, the GTX-B1-24-242SFP 24-port PoE switch is an ideal solution for applications in CCTV IP installations. PoE powering possibility, compatible with the 802.3af/at standard makes the device more universal and easier to install.




SPECIFICATION

LAN ports:	<ul style="list-style-type: none">• 24 x RJ45 (24 x PoE (802.3af/at)),• 2 x Port SFP - Uplink
Management:	—
LED diodes:	Power, PoE, Link/Act, Speed
Transmission speed:	<ul style="list-style-type: none">• 1000 Mbps : 2 x Port SFP - Uplink,• 10 / 100 / 1000 Mbps : 24 x Port LAN & PoE
Operation modes:	<ul style="list-style-type: none">• NOM - Normal - the device operates as normal PoE switch• VLAN - 1 ... 22 ports are isolated from each other and separately work with the 23, 24 ports• CENK (Surveillance Priority Transmission for Uplink) - port traffic balancing control to prevent loss of large data packets
Maximal output power:	30 W / port PoE - 1 ... 24 ports
Maximal total power:	400 W
MAC addresses table:	8k
Main features:	<ul style="list-style-type: none">• MDI/MDI-X auto detection feature - auto detecting the data transmission mode• Full Duplex: IEEE802.3x, Half Duplex: Back Pressure• PD Alive mode - monitoring of the ports that power PoE devices and automatic restart by cutting off the power supply when an unresponsive device is detected• MTBF (Mean Time Between Faults) : 50000 h
Certificates:	CE, FCC Class B
Power supply:	100 ... 265 V AC
Operation temp:	-10 °C ... 45 °C
Weight:	3.39 kg
Dimensions:	440 x 290 x 45 mm, RACK 19", 1U
Guarantee:	2 years

PRESENTATION

Front view:

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

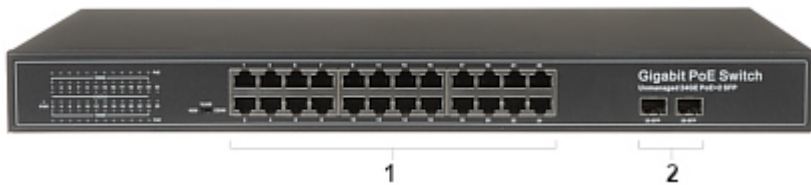


1 - LAN + PoE

2 - SFP

Rear view:



In the kit:

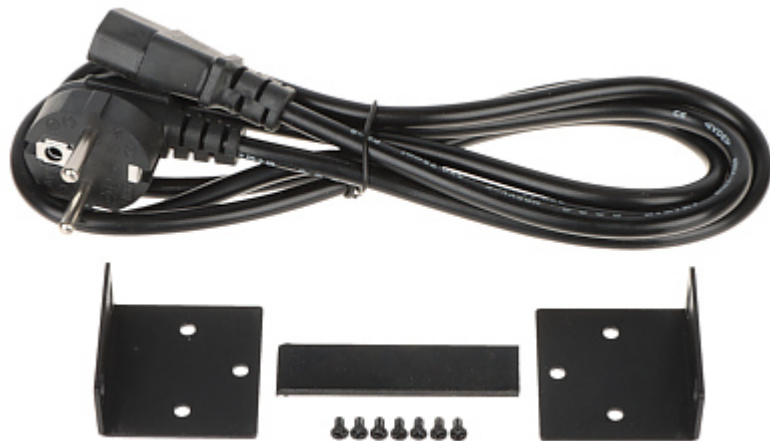

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------