

Code: DH-HAC-HDBW1400RP-VF

# HD-CVI, PAL VANDALPROOF CAMERA **DH-HAC-HDBW1400RP-VF** - 3.7 Mpx, 2.7 ... 13.5 mm DAHUA Net: **103.71 EUR** Gross: **103.71 EUR**

Megapixel camera with 1/3" CMOS sensor and HD-CVI (High Definition Composite Video Interface) / PAL. The HD-CVI interface allows to transmission of analog, composite video signal via coaxial cable. It enables the transmission of HD resolution images for even 500 m distance with keeping the low costs of the installation. During transmission there are no delays and is maintained the original, high quality image.  
**Attention!** In 4 Mpx resolution camera works only with DAHUA recorders supporting that resolution.



## SPECIFICATION

Standard:	HD-CVI, PAL
Sensor:	1/3 " Progressive Scan CMOS
Matrix size:	4.1 Mpx
Resolution:	2560 x 1440 - 3.7 Mpx , 1920 x 1080 - 1080p 1280 x 720 - 720p 960 x 576 - 960H, PAL
Video output:	HD-CVI / CVBS, 1 Vpp / 75 Ω
Lens:	2.7 ... 13.5 mm
View angle:	• 98 ° ... 26 ° (manufacturer data) • 92 ° ... 26 ° (our tests result)
Range of IR illumination:	30 m
IR illuminator support:	ICR - Movable InfraRed filter
IR illuminator power adjustment:	Automatic
S/N ratio:	> 65 dB
OSD menu:	OSD menu available via DAHUA recorder
Main features:	<ul style="list-style-type: none"><li>• D-WDR - Wide Dynamic Range</li><li>• 2D-DNR - Digital Noise Reduction</li><li>• Day/night mode</li><li>• Auto White Balance</li><li>• BLC - Back Light Compensation</li><li>• HLC - High Light Compensation (spot)</li><li>• ICR - Movable InfraRed filter</li><li>• AGC - Automatic Gain Control</li><li>• Auto White Balance</li></ul>

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

Power supply:	12 V DC / 340 mA
Power consumption:	≤ 4.1 W
Housing:	Dome, Metal
Color:	White
"Index of Protection":	IP67
Vandal-proof:	IK10
Operation temp:	-40 °C ... 60 °C
Weight:	0.4 kg
Dimensions:	Ø 122 x 89 mm
Manufacturer / Brand:	DAHUA
Guarantee:	<b>3 years</b>

## PRESENTATION

Camera is out from clamping ring:



Mounting side view:



In the kit:



**OUR TESTS**


Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:

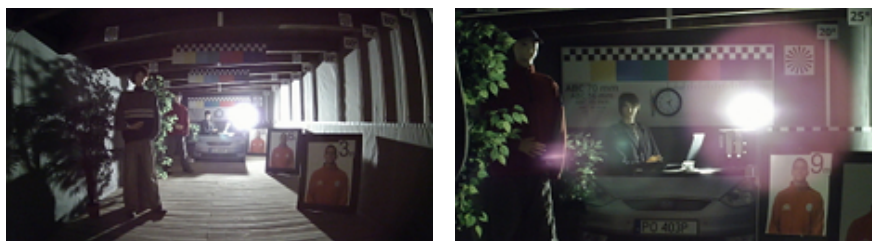

**PACKAGE**

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

